

NRC Publications Archive Archives des publications du CNRC

Multiple-stage triaxial test for determining c' and ϕ' of saturated soils / Détermination des paramètres c' et ϕ' des sols saturés au moyen d'essais triaxiaux échelonnés

Kenney, T. C.

This publication could be one of several versions: author's original, accepted manuscript or the publisher's version. /
La version de cette publication peut être l'une des suivantes : la version prépublication de l'auteur, la version
acceptée du manuscrit ou la version de l'éditeur.

For the publisher's version, please access the DOI link below. / Pour consulter la version de l'éditeur, utilisez le lien
DOI ci-dessous.

Publisher's version / Version de l'éditeur:

<https://doi.org/10.4224/40003256>

*Canadian Papers Presented at the Fifth International Conference on Soil
Mechanics and Foundation Engineering, Paris, July 1961, Technical
Memorandum (National Research Council of Canada. Division of Building*

NRC Publications Archive Record / Notice des Archives des publications du CNRC :

<https://nrc-publications.canada.ca/eng/view/object/?id=45bc42fa-8c07-47ab-adbe-3c280da3bea8>

<https://publications-cnrc.canada.ca/fra/voir/objet/?id=45bc42fa-8c07-47ab-adbe-3c280da3bea8>

Access and use of this website and the material on it are subject to the Terms and Conditions set forth at

<https://nrc-publications.canada.ca/eng/copyright>

READ THESE TERMS AND CONDITIONS CAREFULLY BEFORE USING THIS WEBSITE.

L'accès à ce site Web et l'utilisation de son contenu sont assujettis aux conditions présentées dans le site

<https://publications-cnrc.canada.ca/fra/droits>

LISEZ CES CONDITIONS ATTENTIVEMENT AVANT D'UTILISER CE SITE WEB.

Questions? Contact the NRC Publications Archive team at

PublicationsArchive-ArchivesPublications@nrc-cnrc.gc.ca. If you wish to email the authors directly, please see the
first page of the publication for their contact information.

Vous avez des questions? Nous pouvons vous aider. Pour communiquer directement avec un auteur, consultez la
première page de la revue dans laquelle son article a été publié afin de trouver ses coordonnées. Si vous n'arrivez
pas à les repérer, communiquez avec nous à PublicationsArchive-ArchivesPublications@nrc-cnrc.gc.ca.

The Associate Committee on Soil and Snow Mechanics is one of about thirty special committees which assist the National Research Council in its work. Formed in 1945 to deal with an urgent wartime problem involving soil and snow, the Committee is now performing its intended task of co-ordinating Canadian research studies concerned with the physical and mechanical properties of the terrain of the Dominion. It does this through subcommittees on Snow and Ice, Soil Mechanics, Muskeg and Permafrost. The Committee, which consists of about twenty-five Canadians appointed as individuals and not as representatives, each for a 3-year term, has funds available to it for making research grants for work in its fields of interest. Inquiries will be welcomed and should be addressed to: The Secretary, Associate Committee on Soil and Snow Mechanics, c/o Division of Building Research, National Research Council, Ottawa, Ontario.

This publication is one of a series being produced by the Associate Committee on Soil and Snow Mechanics of the National Research Council. It may therefore be reproduced, without amendment, provided that the Division is told in advance and that full and due acknowledgment of this publication is always made. No abridgment of this report may be published without the written authority of the Secretary of the ACSSM. Extracts may be published for purposes of review only.

NATIONAL RESEARCH COUNCIL
CANADA

ASSOCIATE COMMITTEE ON SOIL AND SNOW MECHANICS

ANALYZED

CANADIAN PAPERS PRESENTED AT THE FIFTH
INTERNATIONAL CONFERENCE ON SOIL MECHANICS
AND FOUNDATION ENGINEERING, PARIS, JULY 1961

TECHNICAL MEMORANDUM NO. 72

OTTAWA
JANUARY 1962

PREFACE

The Fifth International Conference on Soil Mechanics and Foundation Engineering was held in Paris, France, from 17 to 22 July 1961. The first such conference was held in 1936 as a part of the tercentenary celebrations of Harvard University, Cambridge, Mass. The incidence of war necessitated the gap of twelve years between the first two meetings. The second conference was held in Rotterdam in 1948, and the third was held in Zurich in 1953. The fourth was held in London in 1957.

Seven Canadians were present at the Harvard meeting. This number has increased over the years and over 25 were present at the conference in Paris. The Associate Committee on Soil and Snow Mechanics of the National Research Council is pleased to publish the reprints of the eleven Canadian papers which were included in the official proceedings.

The International Society of Soil Mechanics and Foundation Engineering is composed of national sections. The executive body for the Canadian Section is the Associate Committee on Soil and Snow Mechanics of the National Research Council. The principal function of the Canadian Section is to assist in the further development and application of soil mechanics throughout Canada. Enquiries with regard to its work will be welcome; they may be addressed to the Secretary, Associate Committee on Soil and Snow Mechanics, National Research Council, Ottawa 2, Canada.

Robert F. Legget,
Chairman.

Ottawa
January 1962

Multiple-Stage Triaxial Test for Determining c' and ϕ' of Saturated Soils

Détermination des paramètres c' et ϕ' des sols saturés au moyen d'essais triaxiaux échelonnés

by T. C. KENNEY

and

G. H. WATSON, formerly engineers with H. G. Acres & Company Limited, Niagara Falls, Canada

Summary

The multiple-stage compression test provides a possible method of determining the shear strength parameters of a soil, c' and ϕ' , by means of a single test on a single sample. In the past, the multiple-stage principle has been used successfully for testing unsaturated soils, and this paper reports its application to compression testing of saturated natural and remoulded soils. For consolidated undrained tests with pore pressure measurements, it was found that the values of c' and ϕ' determined from multiple-stage tests compare favourably with the results of conventional tests. For fully drained tests, it was found that the multiple-stage compression test could only be applied for soils having low sensitivities.

Introduction

Perhaps the first application of the multiple-stage principle to compression testing of soils was in the development of the "Cell Test" used to measure the shear strength characteristics of saturated soils (see for instance DE BEER, 1950). However, there are several serious objections to this test in its original form, one of which is that the behaviour of the soil sample is largely dependent upon the flexibility of the testing cell. TAYLOR (1950), and FLEMING (1952), have successfully utilized the multiple-stage principle for determining the effective stress shear strength parameters c' and ϕ' of unsaturated soils by loading samples to failure at several different cell pressures and measuring pore pressures throughout the tests.

This paper reports the results of an investigation of the possibility of applying the multiple-stage principle to compression testing of saturated soils in much the same way as it was applied for testing unsaturated soils.

Testing Equipment and Procedures

This investigation was carried out in the laboratories of H.G. Acres & Company Limited. The triaxial compression machine and cells were manufactured by Wykeham Farrance Engineering Limited. The constant cell pressure apparatus and the pore pressure measuring apparatus were built in likeness to those used at the Imperial College, London, and the Norwegian Geotechnical Institute, Oslo, respectively. The samples used were 1.5 inches in diameter and approximately 3.5 inches high. For all tests full end and radial drainage was provided by the use of porous stones and filter paper drains. The top loading cap was fitted with a collar which

Sommaire

L'essai triaxial échelonné, ou triaxial à étapes permet la détermination des paramètres de cisaillement c' et ϕ' en un seul essai d'une seule éprouvette. Autrefois, le principe de l'essai échelonné fut effectué avec succès pour essayer des sols non-saturés et cette communication décrit l'application du même principe aux sols saturés naturels ou remaniés. Les résultats des essais triaxiaux consolidés non drainés échelonnés, avec mesure des pressions interstitielles conduisent à des valeurs de c' et ϕ' qui peuvent se comparer favorablement aux résultats obtenus par des essais conventionnels. D'autre part, les résultats d'essais complètement drainés montrent que l'essai triaxial échelonné ne devrait être appliqué qu'aux sols à faible sensibilité.

prevented the top of the sample from rotating more than 6 degrees from the horizontal.

After each consolidation period, the height, volume, and average cross-sectional area of the samples were computed and to avoid possible errors in measuring pore pressures in undrained tests due to entrapped free air, the pore pressure and the cell pressure were both raised 10 psi in order to dissolve the free air. Since all the samples tested were fully saturated, this procedure is quite acceptable. For all undrained tests, the rate of axial strain used was approximately 4 per cent per hour, while for drained tests the rate of axial strain was usually in the order of 0.3 per cent per hour. This axial strain was applied at a constant rate. After any undrained test had been completed, the load was removed from the sample and a condition of constant pore pressure was allowed to be reached before the test was continued or the sample removed.

Failure Conditions

In Fig. 1 is shown the results of some conventional compression tests. These data are presented in the form of stress paths defined by the measured values of σ_a' and σ_r' (axial and radial effective stresses acting within the sample, respectively) which are plotted for various values of strain throughout the test. Drained tests are represented by vertical paths because σ_r' remains constant, and undrained tests are represented by curved stress paths along which both σ_a' and σ_r' vary. Any point on a stress path, whose position in stress space is defined by particular values of σ_a' and σ_r' , can be represented by a Mohr stress circle, and a line joining

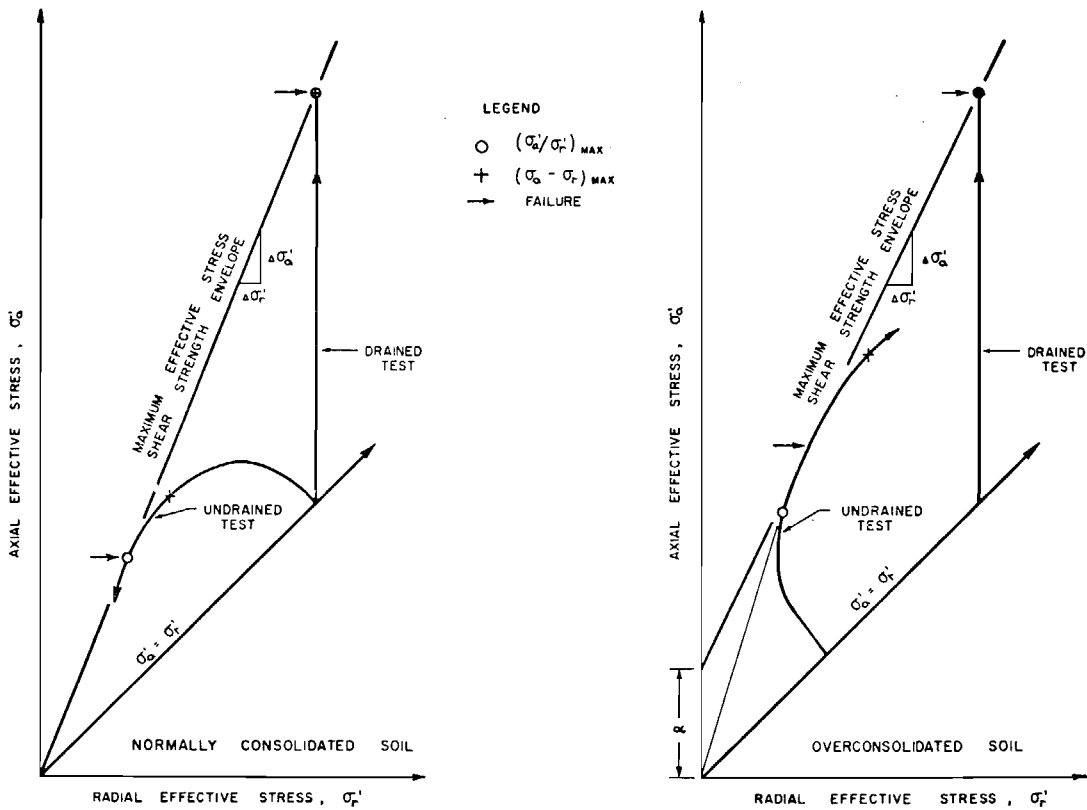


Fig. 1 Method of presenting test results and definition of failure conditions.
Méthode de représentation des résultats d'essais et définition d'états de rupture.

two points on different stress paths can be related to the line tangent to the corresponding stress circles in the following manner :

$$\sin \Phi'_a = \frac{\frac{\Delta \sigma'_a}{\Delta \sigma'_r} - 1}{\frac{\Delta \sigma'_a}{\Delta \sigma'_r} + 1} \quad \dots (1)$$

$$c'_a = \frac{\alpha}{2} \left(\frac{1 - \sin \Phi'_a}{\cos \Phi'_a} \right) \quad \dots (2)$$

where Φ'_a denotes the apparent mobilized angle of shearing resistance, c'_a denotes the apparent mobilized cohesion, α denotes the σ'_a intercept of the line joining the two stress points produced back to the condition of $\sigma'_r = 0$.

At the beginning of the investigation it was first necessary to decide upon a definition of failure in order to determine c' and Φ' . For the purposes of this study, a sample was considered to have reached failure at the point where the stress path was tangent to the maximum effective stress shear strength envelope. Therefore, as it is shown in Fig. 1, failure during a drained compression test is determined by means of either

the $\left(\frac{\sigma'_a}{\sigma'_r}\right)_{\max}$ or the $(\sigma_a - \sigma_r)_{\max}$ failure criterion, failure during an undrained compression test on normally consolidated soil (where $c' = 0$) is determined by means of the $\left(\frac{\sigma'_a}{\sigma'_r}\right)_{\max}$ failure criterion, and failure during an undrained

compression test on overconsolidated soil (where $c' > 0$) cannot be determined by either of these failure criteria (BISHOP & HENKEL, 1957; KENNEY, 1959). However, since it is seldom known when samples are going to exhibit the properties of normally consolidated or overconsolidated soils, it follows from the above discussion that a rigorous failure criterion is only available for the drained test but is unavailable for the undrained test.

For the multiple-stage compression test, and in particular for its application to the undrained type of test, the exact point of failure during any particular test stage does not have to be known; it is more important to know that the test has been carried out far enough to fully mobilize the shear strength parameters c' and Φ' . For this reason, it was decided to investigate the magnitudes of axial strain required to mobilize c' and Φ' to their maximum combined effect. In Fig. 2 are given the results of several drained and undrained compression tests on natural and remoulded normally consolidated soils the properties of which are listed in Table 1. If Φ'_a is the apparent mobilized angle of shearing resistance (Equation 1) and Φ'_{\max} is the fully mobilized value, then M , the degree of mobilization of Φ' at any point during a test, is expressed by the equation :

$$M = \frac{\tan \Phi'_a}{\tan \Phi'_{\max}} \quad \dots (3)$$

From the test results given in Fig. 2, the following conclusions can be drawn concerning the shear strength mobilization of normally consolidated soils :

(1) In most of the undrained tests, Φ' becomes fully mobilized at axial strains less than 15 per cent and generally less than 10 per cent, whereas, in the drained tests, Φ' becomes fully mobilized at axial strains between 15 and 30 per cent.

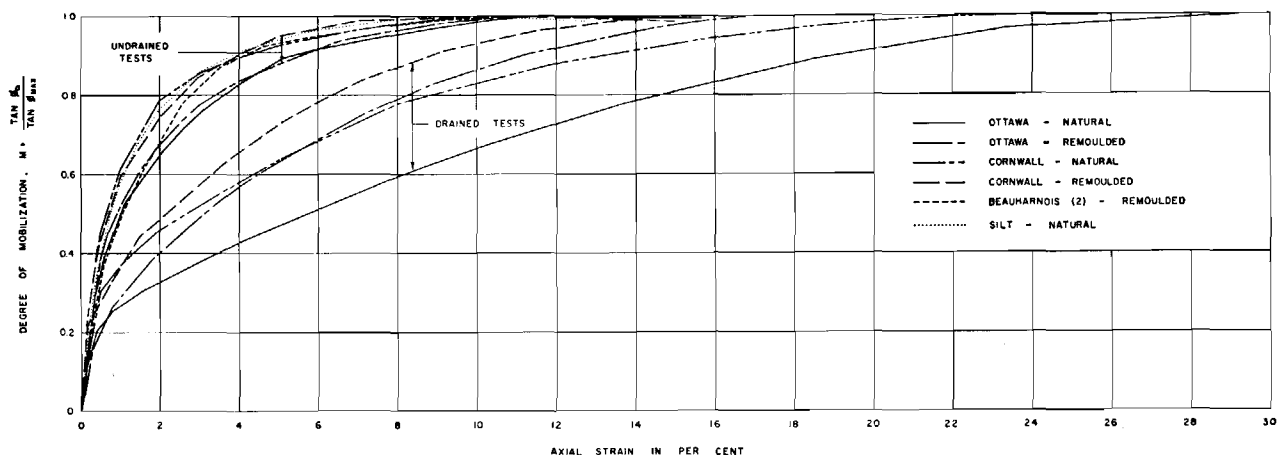


Fig. 2 Mobilization of Φ' with axial strain for several normally consolidated soils.
Mobilisation de Φ' en fonction de la contrainte axiale pour quelques sols normalement consolidés.

Table 1
Properties of soils tested and summary of test results
Propriétés des sols essayés et résumé des résultats

Soil and Origin	L_L P_I	A St	W_n W_r	Test	Natural		Remoulded	
					(1)	(2)	(1)	(2)
					c' Φ'	c' Φ'	c' Φ'	c' Φ'
Ottawa Estuarine	52.8 26.2	< 0.70 20 +	57.1 41.7	U	0 * 34.1 *	0 * 36.1 *	0 35.3	0 35.6
Cornwall Estuarine	27.7 14.1	0.58 10 +	31.4 21.7	U	0.26 34.1	0.26 34.1	0 37.4	0 37.4
				D	—	—	0 35.9	1.04 34.7
					—	—	—	—
Beauharnois 1 Estuarine	69.9 41.8	0.70 —	— 40.4	U	—	—	0.36 31.6	0.53 32.2
				D	—	—	0.90 28.3	0.90 28.3
					—	—	—	—
Beauharnois 2 Glacial Till	43.5 19.3	< 0.70 —	— 32.7	U	—	—	0 30.5	0 30.5
					—	—	—	—
St. Catharines Glacial Till	46.0 25.9	0.43 2	27.2 26.6	U	2.34 26.1	2.34 26.1	2.20 25.8	2.48 26.4
					—	—	—	—
Wallaceburg Glacial Till	40.5 17.2	0.57 4	40.4 35.4	U	0 30.0	—	0.88 29.1	0 29.1
					—	—	—	—
Allanburg Glacial Till	28.5 15.0	< 0.50 3	23.2 23.0	U	0 33.0	—	0 34.8	0 33.4
					—	—	—	—

L_L Liquid limit
 P_I Plasticity index
U Undrained test
D Drained test

A Activity
 St Sensitivity
 c' Psi
 Φ' Degrees

W_n Natural water content
 W_r Remoulded water content
(1) Conventional tests
(2) Multiple-stage tests

*Values measured in the normally consolidated stress range of the soil.

(2) In undrained tests the Φ' mobilization characteristics are comparatively independent of the mineral composition and sensitivity of the soils.

(3) In drained tests the Φ' mobilization characteristics are strongly dependent on soil sensitivity and to a lesser extent on mineral composition.

In Fig. 3 are given the volume changes $\frac{\Delta V_f}{V}$ and axial strains at failure in drained tests of several normally consolidated and overconsolidated soil samples. The results

of these tests indicate that the stiff, insensitive soils fail at low volume changes and low axial strains and that the softer, more sensitive soils fail at higher volume changes and higher axial strains. These test data also infer that for undrained

tests, where zero volume change takes place $\frac{\Delta V_f}{V} = 0$,

the range of axial strains required to fully mobilize c' and Φ' of normally consolidated and overconsolidated soils is from 0 to 15 per cent; present laboratory experience has been that the strains at failure range from 1 to 12 per cent.

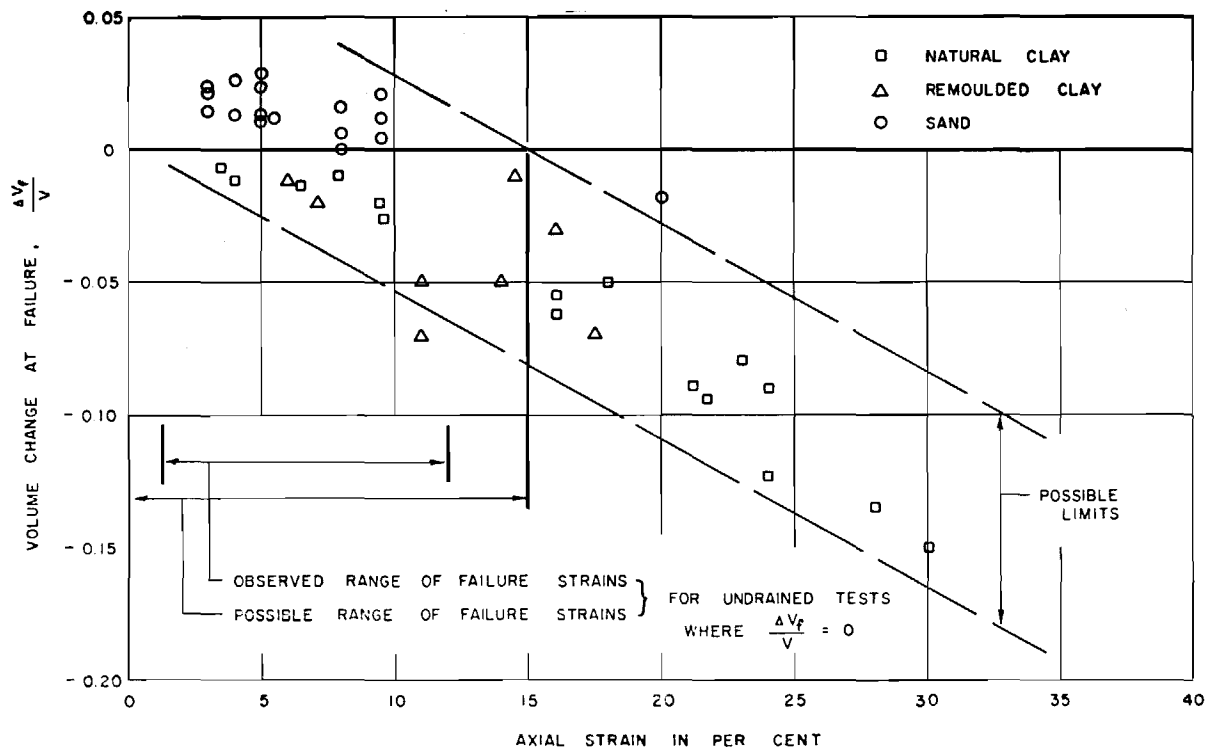


Fig. 3 Volume change and axial strain at failure. Results of drained compression tests on normally consolidated and overconsolidated soils.

Changement de volume et contrainte axiale à la rupture. Résultats des essais drainés de compression sur des sols normalement consolidés et sur des sols surconsolidés.

From the above conclusions it follows that it is possible to fully or nearly fully mobilize c' and Φ' in undrained tests at least two and possibly three times with one sample at different consolidation pressures if axial strains of the order of 25 per cent or more are attainable with the available testing apparatus. For drained tests, c' and Φ' can be fully mobilized in one sample two or more times only if the soils have stable structures and, therefore, low sensitivities.

Undrained Tests

The test procedure for the multiple-stage undrained compression test which was used, consisted of consolidating a sample under different cell pressures, computing the height and volume of the sample after each consolidation phase, raising both the cell pressure and the pore pressure by equal amounts (approximately 10 psi) to dissolve any free air, and loading the sample until an axial strain of 5 to 10 per cent was reached or, in the case of brittle materials, until a failure surface developed in the sample and the load taken by the sample began to decrease rapidly.

To compare the results of the multiple-stage and conventional types of undrained tests, samples of different soils were tested in natural and/or remoulded states. The properties of these soils and a summary of the test results are given in Table 1.

In all the multiple-stage tests recorded herein, three compression stages were used. Typical test comparisons are given in Fig. 4. The following comments are made concerning the testing experience to date :

(1) Only soils having activities less than 0.75 have been tested. In all cases it was possible to bring about failure conditions three times in a multiple-stage undrained test.

(2) The values of c' and Φ' determined from multiple-stage and conventional undrained tests compare very closely

for all the soils investigated. The shapes of the stress paths of the two types of test were not generally similar.

(3) The consolidation pressures which are now generally used for the multiple-stage tests are 10, 30, and 60 psi.

(4) For soft soils of low sensitivity, axial strain increments of 10, 8, and 6 per cent for the first, second, and third stages of the test, respectively, have been found sufficient to fully or nearly fully mobilize c' and Φ' .

(5) For brittle soils, such as overconsolidated or very sensitive soils, full mobilization of c' and Φ' generally occurred at low strains and in this case the test stage should be stopped when the load on the sample begins to decrease rapidly. The subsequent stages are generally extended to at least 10 and 8 per cent respectively unless a brittle type of failure again takes place.

Drained Tests

The test procedure for the multiple-stage drained compression test which was used consisted of consolidating a sample under different cell pressures, computing the height and volume of the sample after consolidation, and loading the sample under drained conditions until failure occurred. Very few of these tests have been performed and only the results of two comparisons are listed in Table 1, both of which were made on remoulded soils. The test results compare fairly closely but the data is insufficient to enable conclusions to be drawn.

Conclusions

It has been found possible to apply the multiple-stage principle to compression testing of saturated soils. For the inactive soils which have been tested, the values of c' and Φ' determined from undrained multiple-stage and conventional

