

NRC Publications Archive Archives des publications du CNRC

Operations requirement for Black Brant Rocket AA-II-43: cosmic ray, Langmuir probe and micrometeorite launch from Churchill Research Range

Staniforth, A.; Steele, K.A.; National Research Council of Canada, Radio
and Electrical Engineering Division

For the publisher's version, please access the DOI link below. / Pour consulter la version de l'éditeur, utilisez le lien DOI ci-dessous.

Publisher's version / Version de l'éditeur:

<https://doi.org/10.4224/21274509>

*Report (National Research Council of Canada. Radio and Electrical Engineering
Division : ERB), 1963-11*

NRC Publications Archive Record / Notice des Archives des publications du CNRC :

<https://nrc-publications.canada.ca/eng/view/object/?id=96a46055-2cf0-46fa-a733-515baf79b216>

<https://publications-cnrc.canada.ca/fra/voir/objet/?id=96a46055-2cf0-46fa-a733-515baf79b216>

Access and use of this website and the material on it are subject to the Terms and Conditions set forth at

<https://nrc-publications.canada.ca/eng/copyright>

READ THESE TERMS AND CONDITIONS CAREFULLY BEFORE USING THIS WEBSITE.

L'accès à ce site Web et l'utilisation de son contenu sont assujettis aux conditions présentées dans le site

<https://publications-cnrc.canada.ca/fra/droits>

LISEZ CES CONDITIONS ATTENTIVEMENT AVANT D'UTILISER CE SITE WEB.

Questions? Contact the NRC Publications Archive team at

PublicationsArchive-ArchivesPublications@nrc-cnrc.gc.ca. If you wish to email the authors directly, please see the first page of the publication for their contact information.

Vous avez des questions? Nous pouvons vous aider. Pour communiquer directement avec un auteur, consultez la première page de la revue dans laquelle son article a été publié afin de trouver ses coordonnées. Si vous n'arrivez pas à les repérer, communiquez avec nous à PublicationsArchive-ArchivesPublications@nrc-cnrc.gc.ca.

Ser
QC1
N21
ERB
no. 661

EE
ERB-661

UNCLASSIFIED

COPY NO.

NATIONAL RESEARCH COUNCIL OF CANADA
ASSOCIATE COMMITTEE ON SPACE RESEARCH

OPERATIONS REQUIREMENT
FOR BLACK BRANT ROCKET AA-II-43

ANALYZED

PREPARED BY
RADIO AND ELECTRICAL ENGINEERING DIVISION

O.R. NO. _____

OTTAWA
NOVEMBER 1963
(REVISED EDITION)

NRC # 22077

OPERATIONS REQUIREMENT FOR BLACK BRANT ROCKET AA-II-43

Cosmic Ray, Langmuir Probe and Micrometeorite
Launch from Churchill Research Range

CRR Operations Requirement No. 130

Prepared by: A. Staniforth and K.A. Steele

(Revised Edition)

ANALYZED

OTTAWA

APRIL 1964

666 2346

FOREWORD

The Operations Requirement is a document prepared by the Range User, describing in detail the requirements at the rocket range to accomplish a specific test or a series of tests in the over all test program. The accepted OR is the established method by which Users obtain support from the Churchill Research Range.

ABSTRACT

Black Brant Rocket AA-II-43 was instrumented by NRC to measure various phenomena in the upper atmosphere associated with auroral activity. The instrumentation included cosmic ray detectors concerned with the energy spectrum and direction of particles associated with auroral activity, Langmuir probe measurements of the fine structure of electron density and energy spectra, and acoustic type impact sensors for micrometeorite detection. The rocket is to be directed into a visible auroral display under conditions of darkness, no cloud cover, and no moon. The Operations Requirement states requirements for working space, transport, power, communications, meteorological and other technical support at the Range. It describes briefly the test and the rocket, and gives details of the telemetry used and the data to be recorded. A detailed User countdown is also included.

20 Feb. 1964

OR

UNCLASSIFIED
OR ANNEX CONTROL SHEET

<u>PAGE</u>	<u>PARA. NO.</u>	<u>INST./REMARKS</u>
10	1.6	Delete third paragraph.
12	2.2	Delete item 11 under still photo- graphs.
16	2.3.1	Revise "Received Signal Strength on Track 2" as follows:

<u>T/M Link</u>	<u>Antenna</u>	<u>Subcarrier Freq.</u>	<u>IRIG No.</u>
#1-219.5	Range Circ. Pol. CRR Rx #1	22 kc	14
#1-219.5	Range Circ. Pol.	30 kc	15

COPY NO. _____

15 Nov. 1963

OR

TABLE OF CONTENTS

<u>PARA. NO.</u>	<u>PARAGRAPH TITLE</u>	<u>PAGE NO.</u>
	Title and Signature Page	i
	Distribution List	ii
	OR Revision Control Sheet	iii
	Table of Contents	iv
	Test Security Classification	vi
1.0	GENERAL INFORMATION	1
1.1	Operations Command	1
1.2	Range Time Utilization	2
1.3	Test Objectives	7
1.4	Test Description	8
1.5	Test Vehicle Description	8
1.6	Range User's Instrumentation	10
1.7	Summary of Frequency Utilization	12
2.0	DATA	13
2.1	Metric	13
2.2	Engineering Photography	14
2.3	Telemetry	16
2.4	Other Data	21
3.0	METEOROLOGICAL SERVICES	22
3.1	Forecasts	22
3.2	Observations	22
3.3	Minima	23
4.0	SUPPORT INSTRUMENTATION	24
4.1	Communications - General	24
4.2	Radio	24
4.3	Wire	24
4.4	Timing	25
4.5	Sequence	26
4.6	Visual Countdown and Status Indicators	26
4.7	Data Handling	26
4.8	Command Control	27
4.9	Other Support Instrumentation	27
5.0	MATERIAL AND SERVICES	28
5.1	Services	28
5.2	Vehicles and Ground Handling Equipment	29
5.3	NR Propellants, Gases, Chemicals	29
5.4	NR Chemical and Physical Analysis	29
5.5	NR Bioscience	29
5.6	Test Instrument Maintenance and Calibration	29
5.7	Climatic Clothing Requirements	30

15 Nov.1963

OR

TABLE OF CONTENTS (CONTINUED)

<u>PARA. NO.</u>	<u>PARAGRAPH TITLE</u>	<u>PAGE NO.</u>
6.0	TRANSPORTATION LOGISTICS	31
6.1	Surface	31
6.2 NR	Air	32
7.0	RECOVERY	33
8.0	AIRCRAFT AND SEACRAFT	34
9.0	DATA PROCESSING AND DISPOSITION	35
9.1	General Information	35
9.2	Disposition of Data	35
9.3	Meteorological Data	36
9.4 NR	Support Instrumentation	37
9.5 NR	Material and Services Report	37
9.6	Transportation Reports	37
9.7 NR	Recovery Reports	37
9.8 NR	Aircraft Reports	37
10.0	FACILITIES	38
10.1	Facilities - General	38
11.0	RANGE SAFETY	39
	APPENDICES	41

15 Nov.1963

OR

1.0 GENERAL INFORMATION

1.1 Operations Command

The following personnel will be at the Rocket Facility, Fort Churchill, in connection with this program.

A total of ten range user personnel (NRC) will work on this program at Fort Churchill.

No visitors are expected at this test.

A list of names with duties and dates of arrival will be forwarded to RFOAR at a later date.

Trial Coordinator	-	A. Staniforth
Project Scientist	-	A.G. McNamara

15 Nov.1963

OR

1.2 Range Time Utilization

1.2.1 Test Duration and Frequency

This OR is for requested support in firing one Black Brant IIA rocket. It is anticipated that Range User equipment and personnel will be at the Rocket Facility for about one month, commencing about March 26th, 1964. Support for living accommodation, transport, equipment and rocket storage, assembly and blockhouse space, power, and communications is requested for this period. Rocket assembly, fin alignment, arming, placing the rocket on the launcher, etc. will be the responsibility of the range contractor. Operation of the Range Telemetry Station and radar may be requested a day or two before the scheduled firing in conjunction with nose cone instrumentation preparation and a complete "dress" rehearsal of the launching.

Day-to-day rescheduling of the launching may be necessary due to weather and other requirements of the vehicle and experiments. Data on vehicle performance and launch restrictions will be made available from CARDE for this particular rocket. This data is based, in part, on information supplied to CARDE by NRC on estimated nose cone weight and C. of G. and nose cone shroud holes and projections. It is understood that a report concerning the Black Brant IIA vehicle originating from CARDE is available to CRR.

Desired experiment conditions are:

- (a) aurora
- (b) darkness, no cloud cover and no moon
- (c) during a near pass of the Alouette satellite, if still operating

and are listed in the order of decreasing importance. Absence of both (a) and (b) may justify postponement of a scheduled launching. A hold for aurora is desired at T-3.5 minutes with provision for resumption of count on 30 seconds notice.

1.2.2 General Countdown

TIME

FUNCTION/SERVICE

Preparation Phase:

F-7 day

Rocket motor, fins, igniter, arrive at Fort Churchill via air transport. These parts may

15 Nov. 1963

OR

1.2.2 General Countdown (cont'd.)

TIME

FUNCTION/SERVICE

Preparation Phase:

F-7 day (cont'd.)

be shipped several weeks prior to this time.
Range requested to unload and transport to
launch site storage (6.1.2).

Nose cone, nose cone instrumentation, check-out
equipment and nose cone control unit arrive at
Fort Churchill. This equipment will be
consigned to DRNL. DRNL is requested to supervise
the unloading and arrange to have the equipment
transported and stored in the preparation area
allotted to this project. (6.1.2)

Range User personnel arrive at Fort Churchill.
Accommodation and personnel transportation
support requested. (Request for accommodation
will be made to DRNL.) (5.1.2)

F-6 day

Range User personnel begin setting up check-
out equipment and preparation of nose cone
instrumentation. Request:

1. Preparation area space (10.1).
2. Blockhouse space (10.1).
3. Transportation (6.1.1).
4. Power (5.1.1).
5. Support for connection of umbilical cable (4.3.3).
6. Communications (4.1).
7. Parallax camera operation (1.6.1).
8. Meteorological services (3.0).
9. Office space at DRNL and telephone (10.1).

F-1 day

Nose cone preparation complete.
Move nose cone, payload control console, power
supplies, etc. to blockhouse.
Battery charging complete.
Install all batteries to payload.
Complete instrumentation check-out with nose cone
shroud off.
Radar beacon check.
Magnetometer check.
Request support of telemetry station, radar, DRNL
and pad services and engineering for launch "dress
rehearsal". (5.1.6)

15 Nov.1963

OR

1.2.2 General Countdown (cont'd.)

TIME

FUNCTION/SERVICE

Launch Phase:

If it is very cold, it is desirable to keep the time between elevation of the launcher and ignition to a minimum. It is understood that minimum motor temperature for launching is 0°F on the engine skin. Heaters will be used in the nose cone payload space as the payload temperature must be kept above 32°F.

T-6:00:00

Final visual inspection of payload and battery check.
Check complete length of umbilical cable from console in blockhouse to vehicle 50-pin connector with test box.
Assemble nose cone shroud to payload.
Pressurize nose cone to 5 p.s.i.g.

T-4:10:00

All Range User personnel on station.

T-4:00:00

Move nose cone to hazardous assembly.

T-3:50:00

Range begin count with Range User.

T-3:40:00

Mount nose cone on motor.
Remove strippable paint and clean nose cone.
Check pressure of nose cone and pump, if necessary.

T-3:00:00

Vehicle brought to launch bay.

T-2:50:00

Install vehicle on launcher.
Check that payload control console is disconnected from umbilical.
Connect umbilical to vehicle.
Connect motor temperature sensor.
Connect beacon batteries.
Check nose cone pressure and pump if necessary.
Install access hatch in forward body temporarily.

Clean nose cone.

T-2:20:00

Clear launch bay for horizontal instrumentation checks:

T-2:15:00

Begin horizontal instrumentation checks.

15 Nov. 1963

OR

1.2.2 General Countdown (cont'd.)

TIME

FUNCTION/SERVICE

Launch Phase:
(cont'd.)

Link #1 (219.5 Mc) -
External power.
Discharge batteries to plateau.
Internal power.
Telemetry note signal condition of SCO's.
Check Langmuir probes with resistance unit,
(User in launch bay).
Check micrometeorite detectors.
Check cosmic ray detectors. (During H checks)
Radar beacon checked with external and internal
power.
Radar interrogate beacon while SCO calibration
is done at 0, 2.5 and 5 volts.
Payload switched to external.
All umbilical power off.
Telemetry check ground Link #2 (225.7 mc) from
Radar site.
Install shorting plug (Bellows actuators)
Remove safety belts.
Final installation of access hatch.
Horizontal checks completed.
Arm vehicle.
Elevate launcher.
Begin vertical instrumentation checks.
External power on (warm up only).
Internal power on.
Check: Main telemetry - Twin Lakes Telemetry
Telemetry note tuning and signal strength of
receivers and signal condition of SCO's.
Status of scientific experiments recorded by User
at Operations Building.
Payload telemetry switched to 2.5 volt calibrate
for adjustment of telemetry paper recorders.
Telemetry paper recorders record signals for
30 seconds at 0.4 inches per second.
Check magnetometer readings and battery monitors.
Check beacon.
Radar interrogate beacon.
Payload switched to external, filament power and
heaters on only. All power off if hold of 30
minutes or more called.
Vertical checks complete.
All instrumentation stations report status:
Telemetry
Radar
Vehicle Payload
D.R.N.L.
Project Scientist

T-1:35:00

T-1:00:00

T-0:30:00

T-0:15:00

T-0:08:00

15 Nov. 1963

OR

1.2.2 General Countdown (cont'd.)

<u>TIME</u>	<u>FUNCTION/SERVICE</u>
Launch Phase (cont'd.)	
T-0:06:00	Automatic hold, check with User Vehicle Controller. Indefinite hold, with one minute notice of resumption of count.
T-0:05:00	Direct voice count to camera sites begins.
T-0:04:00	External power on to payload filaments, if not already on.
T-0:03:30	Hold for aurora, resumption of count on 30 seconds notice.
T-0:03:00	Telemetry Link #1 turned on internal power and to signal input.
	Beacon turned on internal power.
	Check beacon.
	Radar interrogate beacon.
T-0:02:30	Commence 2.5V calibration. T/M zero discriminators.
T-0:02:00	Start all instrumentation recorders. T/M acknowledge. Paper recorders on at slow speed.
T-0:01:35	Telemetry switched to 0 volt calibration.
T-0:01:25	Telemetry switched to 5 volt calibration.
T-0:01:15	Begin 3 cycles of 11 step (0 to 5 volts) calibration on telemetry.
T-0:01:00	Telemetry switched to signal input and internal calibration.
	Acknowledge all green on payload control console.
	Telemetry acknowledge signal condition of SCO's.
	Radar start camera operation.
T-0:00:40	Paper Recorders on fast speed.
T-0:00:00	Black Brant IIA Rocket ignites.

15 Nov.1963

OR

1.2.2 General Countdown (cont'd.)

TIME

FUNCTION/SERVICE

Launch Phase (cont'd.)

T + 0:00:20	Rocket motor burns out.
T + 0:00:30	Multiplex relay transfer.
T+0:00:40	Extension of Langmuir long probes.
T+0:00:200	Apogee (approximately 85 miles alt.)
T+0:00:400	Impact

Apart from initial preparations and checkout the camera sites at O'Day and Belcher need not be manned, except on those days scheduled for a launching or a complete "dress rehearsal". Helicopter may be required for up to five people and 500 lbs. of equipment.

1.3 Test Objectives

1.3.1 Primary

Concerned with measurements in the upper atmosphere:

(a) Cosmic Ray experiment concerned with study of particles associated with auroral activity (NRC).

(b) Langmuir Probe measurements of fine structure of electron density and electron energy spectrum inside and outside auroral formations (NRC).

(c) Micrometeorite Detector - an acoustic type impact counter concerned with impact rates and energy distribution inside and outside major meteor showers and association with auroral activity (NRC).

15 Nov. 1963

OR

1.3.1 Primary (cont'd.)

(d) Photometer to indicate periods during which the vehicle is within an auroral formation.

1.4 Test Description

The Black Brant IIA rocket AA-II-43 will carry several experiments in its nose cone for scientific investigation of the upper atmosphere. It is desired that the vehicle be launched at an elevation of 85° nominal. There is no preferred launch azimuth. Presumably impact will be into Hudson's Bay. Recovery is not required. The desirable conditions at launching in order of importance are: (a) aurora, (b) darkness, no cloud cover, and no moon, and (c) during a near passage of the Alouette Satellite if still operating. Postponement of the launching may be requested if either of conditions (a) or (b) is not met at a scheduled launch time.

Events of primary importance during flight are the extension times of the various units in the nose cone:

Langmuir probes at T + 40 seconds. Other events of interest are motor burnout, apogee and impact. It is requested that sound ranging equipment be used for impact data, although recovery is not required. Range User personnel will man only the nose cone instrumentation control console during the rocket flight. They will also operate equipment to monitor the outputs from the discriminators of the 219.5 mc link. RFOAR is requested to provide outputs from discriminators for Range User's oscilloscopes and recorders. It is assumed that the parallactic cameras will be operated by DRNL personnel.

1.5 Test Vehicle Description

The Black Brant IIA is a single stage, solid propellant, unguided, sounding rocket. This vehicle will be fitted with the Black Brant IIA modified fins.

Length	-	332.5 inches (approx.)
Diameter	-	17.2 inches
Launch weight	-	2750 lbs.(approx.)
Weight at burnout	-	900 lbs. (approx.)
Propellant	-	Aluminized single grain polyurethane-ammonium perchlorate

15 Nov. 1963

OR

1.5 Test Vehicle Description (cont'd.)

Total Impulse (sea level)	-	380,000 lbs.
Motor burning time	-	15.5 seconds
Guidance	-	None - 3 fixed fin stabilization
Cut-down system	-	None

General performance of the vehicle will be obtained from CARDE. The weight and centre of gravity of the nose cone and payload are furnished by NRC to CARDE, who then calculate vehicle performance. It is understood that RFOAR has a manual on the Black Brant IIA furnished by CARDE. Special instructions concerning the fins fitted on AA-II-43 will be furnished to RFOAR by CARDE.

1.5.1 Complete Vehicle Drawing

1.5.1.1 Vehicle Drawing

See Appendix I.

1.5.1.2 Nose Cone Drawing

See Appendix II

1.5.2 Telemetry System

The nose cone telemetry is a PAM/FM/FM system operating at 219.5 mc with 218.0 mc as a possible alternate frequency, 5 watts. The antenna consists of two quadraloop radiators mounted 180° apart on the surface of the nose cone at station 91. The polarization is linear.

A ground telemetry link (Link #2) operating at 225.7 mc will be operated between the radar site and the launch site for the purpose of recording radar data on the same tape recorder as the vehicle telemetry (Link #1). Further data is given under para. 1.6.

1.5.3 Beacon

RFOAR is requested to provide an AN/DPN-41 radar beacon and batteries. Range User will provide space and mounts for beacon, a box for holding 5 Yardney Type HR-3 batteries and wiring from the beacon to the batteries and to the umbilical connector. It is understood that check-out and control of the beacon requires the use of seven conductors through the umbilical connector, details of which are to be provided by RFOAR. The final check-out, operation and control of the beacon is to be the responsibility of RFOAR. User will monitor beacon functions on Link #1; see Appendix VIII.

15 Nov. 1963

OR

1.5.3 Beacon (cont'd.)

NRC will supply quadraloop antennas tuned for a beacon transmitter frequency of 2880 mc and beacon receiver frequency of 2810 mc.

1.5.4 Command Control/Destruct System

The Black Brant IIA rocket contains no destruct or flight termination system.

1.5.5 Ordnance Items

Characteristics of propellant, igniter, and squib are available in CARDE manual on Black Brant IIA rocket.

Bellows actuators (squib) are used in two of the Langmuir Probes. These devices are type BA31D2, made by Hercules Powder Company, Wilmington, Delaware.

Bridge Resistance:	5-9 ohms
Maximum Non-fire:	50 ma., one 30 sec. pulse
Minimum Fire:	0.3 amp.
Recommended Fire:	1.0 amp.
Ignition Time:	0.25 milliseconds at 1.0 amp.

The location of these items is shown on the drawing given in Appendix III. The Bellows actuator timer and arming circuit is given in Appendix IV.

1.6 Range User's Instrumentation

The Range User will supply all equipment for check-out and assembly of the nose cone payload. Range User personnel will operate the control unit for the payload and will monitor fourteen channels (IRIG Nos. 1-4 and 9-18 inclusive) of the 219.5 mc link in the blockhouse during the firings. Discriminator outputs at the $\pm 10V$ level for $\pm 7.5\%$ deviation into a 10K ohm load at the blockhouse are required. The discriminator outputs from IRIG Channels 1-4 and 9-17 inclusive must be available for monitoring, using high impedance instruments, in the User area adjacent to the telemetry room in the Operations Building. RFOAR is requested to provide outputs from the telemetry discriminators for all of these monitors. See Appendix IX for wire lines into Nose Cone Assembly area.

Range User may also operate a telemetry receiver, tunable discriminator, and auxiliary display oscilloscope beside

15 Nov. 1963

OR

1.6 Range User's Instrumentation (cont'd.)

the payload control console in the blockhouse. RFOAR is requested to have a telemetry antenna on the roof of the blockhouse available for use with Range User's receiver. The antenna with lead-in available to Range User in April 1963 would be suitable.

Range User will provide a set of three telemetry band antennas with vertical, horizontal, and RH circular polarization for mounting on Tracker #2 platform. The Link #1 signal from these antennas will be sampled and fed via coaxial cable to a receiver in the User area adjacent to the telemetry room in the Operations Building. RFOAR is requested to assist with mounting of the antennas and to provide two coaxial cables, one for receiver input and the other for calibration, and a shielded cable of four #20 or larger conductors for synchronizing signals to the multiplexer. A single wire line which will use the shield of the synchronizer wires as return is requested for a User intercom. The decommutated signal strength output of the receiver is used to modulate six subcarrier oscillators whose summed outputs are recorded on telemetry tape recorder Track 2. RFOAR is requested to supply a coaxial cable from the location of this equipment in the User area to the telemetry magnetic tape recorder's input panel. A block diagram of the above instrumentation is included as Appendix VII, Sheet 1. Refer also to Appendix IX.

AGC output from the RFOAR receivers on Link #1 is requested to the User subcarrier oscillator panel, in the User area, for subsequent recording with User signal strength data on magnetic tape recorder Track #2.

RFOAR is requested to provide suitable input signals for a ground telemetry link from the Radar Site to the Operations Building for the transmission of the coded radar data from the ADR equipment, radar time, and radar receiver AGC. Range User will supply an FM/FM system consisting of:

1. 1-watt Transmitter at 225.7 mc/s.
2. 5 Subcarrier Oscillators with suitable mixing network, 70.0, 52.5, 40.0, 30.0 and 22.0 kc.

User will supply a 5-unit subcarrier oscillator panel so that AGC from all three radars can be recorded via this link. ADR data is requested at 5 samples per second.

RFOAR is requested to supply suitable antennas and a receiver at the Operations Building. The data is to be recorded on Teack 4 of the magnetic tape recorders.

It would be desirable to duplicate all telemetry reception and recording functions whenever possible. Appendix V

15 Nov. 1963

OR

1.6 Range User's Instrumentation (cont'd.)

contains a list of equipment Range User will take to Fort Churchill. Some items, such as receivers, may be made available for operation and under complete control by the RFOAR telemetry station for this program.

Operation of the telemetry facilities at Twin Lakes to duplicate functions at the launch site as much as possible is requested. User will provide amplifiers and subcarrier oscillators for tape recording AGC data at Twin Lakes.

User will provide a decommutator for use at Launch T/M Station.

1.6.1 DRNL Instrumentation Support

DRNL will be requested to operate the following equipment prior to and during the launch phase:

- (a) 4" by 5" Rapid Scan Spectrometer, 3000-11,000 Å⁰
- (b) H β and other Photometers
- (c) 16 mm All Sky Camera
- (d) Flux Gate Magnetometer
- (e) Height-finding Stations (for aurora)
- (f) Auroral Radar
- (g) Prince Albert Radar (to be arranged by NRC with PARL and DRNL)
- (h) Ionosonde (request approx. 4 sweeps/min. from T+0 to T+6 min.)
- (i) 30 mc Polar Riometer (to be arranged by NRC with CRR)
- (j) DRNL will provide magnetic tape of voice countdown
- (k) Provide auroral activity predictions
- (l) Communications for ground instrumentation (launch sight to Belcher and O'Day)
- (m) Communication between DRNL and Prince Albert Radar.

1.7 Summary of Frequency Utilization

- (a) Ground Link: DRNL to Belcher and O'Day radio link
DRNL to Prince Albert Radar
Link #2 - Radar site to Operations Building,
225.7 mc telemetry link for radar ADR data.
- (b) Rocket Links:

TLM				
<u>Link No.</u>	<u>Freq.</u>	<u>Class</u>	<u>Equipment</u>	<u>Location</u>
-	2880 mc	U	Radar beacon	Nose cone
1	219.5 mc or 218.0 mc alternate	U	Telemetry	Nose cone

15 Nov.1963

OR

2.0 DATA

2.1 Metric

Coordinate System: cartesian, with origin at base centre of launcher, Z-axis passing through origin and earth centre of gravity. X-axis passing through the origin perpendicular to Z-axis and oriented true North, Y-axis passing through origin and perpendicular to X and Z axes. Positive directions Z, X, Y are up, north and east respectively.

2.1.1 Launch to Impact

<u>Item</u>	<u>Data</u>	<u>Interval</u>	<u>Data Points/Sec.</u>	<u>Reduced Data Accuracy</u>		
				<u>Class I</u> (Plotting Board)	<u>Class II</u> (ADR. Tape)	<u>Class III</u>
1.	Position (X,Y,Z)	Throughout Flight	5 from T-0 to splash	1000 ft.	500 ft.	--
2.	Velocity (V _X ,V _Y ,V _Z ,V _S)	Throughout Flight	5 from T-0 to splash	1000 ft.	500 ft.	--

where $\theta = \arcsine \frac{V(Z)}{V(S)}$

$\phi = \arctangent \frac{V(Y)}{V(X)}$

where V_S = tangential velocity.

0. Radar data is requested from Lift-off, T -

15 Nov. 1963

OR

2.1.2 Impact

Impact coordinates are desired by sound ranging equipment even though recovery is not a requirement.

2.2 Engineering Photography

Documentary 16 mm color photography is requested from the arrival time of project personnel. This is to include coverage of payload assembly and checkout as well as the launch phase.

The movie coverage should include the following sequences:

1. Setting up racks in preparation area.
2. Working on nose cone instrumentation with shroud off.
3. Placing shroud on instrumentation.
4. Moving nose cone to Hazardous Assembly.
5. Installing T/M antennas.
6. Assembly to motor.
7. Placing complete vehicle on launcher.
8. Launch.

4 x 5 still photography is requested on call throughout the program for coverage of payload assembly, checkout, and vehicle assembly. One negative of each photograph taken is to be sent to NRC, Radio and Electrical Engineering Division, Attention: Mr. W.L. Haney.

Still photographs, which may include some 35 mm color transparencies, should include the following:

1. Equipment in preparation area.
2. Nose cone instrumentation, shroud off.
3. Nose cone instrumentation, shroud on.
4. Control console in blockhouse.
5. Assembled rocket and motor on dolly.
6. Rocket on launcher, horizontal.
7. Rocket on launcher, vertical.
8. Close up of umbilical cable from launcher boom to vehicle.
9. Equipment at DRNL.
10. NRC antennas on platform near Operations Building.
11. Scientist's Observation Platform.

15 Nov. 1963

OR

2.2 Engineering Photography (cont'd.)

Engineering analysis of the launch phase is not required.

15 Nov. 1963

OR

2.3 Telemetry

ITEM NO.	LINK FREQ.	NO.	FREQ.	DEV. $\pm\%$	MEASURING RATE	RECORDING INTERVAL	CLASS	ACCURACY $\pm\%$	REMARKS
1	219.5 mc FM/FM	1	400 cps	7.5	Cont.	T-0:02 to splash	I) Event Channels
2	219.5 mc FM/FM	2	560 cps	7.5	Cont.	T-0:02 to splash	I		
3	219.5 mc FM/FM	3	730 cps	7.5	Cont.	T-0:02 to splash	I		
4	219.5 mc FM/FM	4	960 cps	7.5	Cont.	T-0:02 to splash	I		
5	219.5 mc FM/FM	9	3.9 kc	7.5	Cont.	T-0:02 to splash	I	2%	
6	219.5 mc FM/FM	10	5.4 kc	7.5	Cont.	T-0:02 to splash	I	2%	
7	219.5 mc FM/FM	11	7.35 kc	7.5	Cont.	T-0:02 to splash	I	2%	
8	219.5 mc FM/FM	12	10.5 kc	7.5	Cont.	T-0:02 to splash	I	2%	
9	219.5 mc FM/FM	13	14.5 kc	7.5	Cont.	T-0:02 to splash	I	2%	
10	219.5 mc FM/FM	14	22.0 kc	7.5	Cont.	T-0:02 to splash	I	2%	
11	219.5 mc FM/FM	15	30.0 kc	7.5	Cont.	T-0:02 to splash	I	2%	
12	219.5 mc FM/FM	16	40.0 kc	7.5	Cont.	T-0:02 to splash	I	2%	
13	219.5 mc FM/FM	17	52.5 kc	7.5	Cont.	T-0:02 to splash	I	2%	

(cont'd.)

15 Nov. 1963

OR

2.3 Telemetry (cont'd.)

ITEM NO.	LINK FREQ.	NO.	FREQ.	DEV. $\pm\%$	MEASURING RATE	RECORDING INTERVAL	CLASS	ACCURACY $\pm\%$	REMARKS
14	219.5 mc PAM/FM/FM	18	70.0 kc	7.5	300/sec.	T-0:02 to splash	I	2%	Commutated Channel, 30 x 10 per sec.
15	225.7 mc FM/FM	14	22.0 kc	7.5	Cont.	T-0:02 to splash	I	2%)	
16	225.7 mc FM/FM	15	30.0 kc	7.5	Cont.	T-0:02 to splash	I	2%)	
17	225.7 mc FM/FM	16	40.0 kc	7.5	Cont.	T-0:02 to splash	I	2%)	Ground Link: Radar Site to Operations Eldg.
18	225.7 mc FM/FM	17	52.5 kc	7.5	Cont.	T-0:02 to splash	I	2%)	
19	225.7 mc FM/FM	13	70.0 kc	7.5	Cont.	T-0:02 to splash	I	2%)	

15 Nov. 1963

OR

2.3.1 Recordings

The following recordings on magnetic tape are requested: (From T-0:02:00 to splash)

<u>Track</u>	<u>Record</u>
1	IRIG Timing Format "B" and Format "C"
2	Received Signal Strength Data
3	Nose Cone Telemetry (219.5 mc)
4	Voice Countdown, tape servo reference and radar data
5	Nose Cone Telemetry (219.5 mc)
6	Timing Format "B"
7	Timing Format "C"

The tape servo reference to be recorded on Track 4 should be a 17 kc square wave, modulated 50% by a precision 60 cps supply. A 100 kc sinusoidal reference is to be recorded on track 5 with the nose cone telemetry signal.

Two timing signals are requested:

- a) standard time Format "B" with a 1 kc carrier
- b) standard time Format "C" with a 100 cps carrier

First motion is to be indicated by an increase in amplitude of the timing signals (level increased by three times).

The signal strength of the 219.5 mc link is to be recorded from T-0:02:00 to impact. This will be recorded as FM information by use of a voltage-controlled subcarrier oscillator which will be supplied by NRC. Range User may also operate the Range User Support Instrumentation for signal strength measurement (described in Section 1.6 and Appendix VII, Sheet 1).

RECEIVER SIGNAL STRENGTH ON TRACK 2

<u>TLM LINK</u>	<u>ANTENNA RANGE</u>	<u>SUBCARRIER FREQUENCY</u>	<u>IRIG NO.</u>
21-219.5 mc	Range TLM #1	5.4 kc	10
"	Range TLM #2	7.35 kc	11
"	User Circular Pol.	10.5 kc	12
"	User Horizontal Pol.	14.5 kc	13
"	User Vertical Pol.	22.0 kc	14
"	User Circular Pol.	30.0 kc	15
"	User Horizontal Pol.	40.0 kc	16
"	User Vertical Pol.	52.5 kc	17

15 Nov. 1963

OR

2.3.2 Special Requirements

Real time paper records of the following channels is requested.

ITEM NO.	S.C.O. FREQ.	DATA FREQ. (cps)	PAPER RATE (in./sec.)	RECORD INTERVAL (sec.)	DATA
<u>219.5 Mc FM/FM Link #1</u>					
1	400 cps	5	0.4	T-2 to Impact	Langmuir Probe Extension
2	560 cps	5	0.4	T-2 to Impact	Altitude Switch
3	730 cps	5	0.4	T-2 to Impact	Pressure Switch
4	960 cps	5	0.4	T-2 to Impact	Multiplex Relays
5	3.9 kc	10	0.4	T-2 to Impact	Plasma Probes-3" D.C. Ion
6	5.4 kc	81	2	T-2 to Impact	Plasma Probes-Sweep Waveforms
7	7.35 kc	110	2	T-2 to Impact	Plasma Probes-D.C. Planar, ^{DC} Sigs
8	10.5 kc	160	2	T-2 to Impact	Plasma Probes-3" Trap Sig.
9	14.5 kc	220	10	T-2 to Impact	Cosmic Ray - Std. Pkg.
10	22.0 kc	330	10	T-2 to Impact	Cosmic Ray-Total Energy
11	30.0 kc	450	10	T-2 to Impact	Cosmic Ray-Pitch Angle
12	40.0 kc	600	2	T-2 to Impact	Plasma Probes-Planar A-C Sigs.
13	52.5 kc	790	2	T-2 to Impact	Plasma Probes-Swept Electrometer
14	70.0 kc	Commutator 30 x 10/sec.	10	T-2 to Impact	All commutator data.
<u>Ground Telemetry</u>					
15	Direct Record	50	0.4	T-2 to Impact	Signal Strength 219.5 mc link Range TLM #1.

(cont'd.)

15 Nov. 1963

OR

2.3.2 Special Requirements

Real time paper records of the following channels is requested.

ITEM NO.	S.C.O. FREQ.	DATA FREQ. (cps)	PAPER RATE (in./sec.)	RECORD INTERVAL (sec.)	DATA
-------------	-----------------	---------------------	--------------------------	------------------------------	------

Note: Items 1, 2, 3, 4, 5 and 15 may be recorded, each equal displacement, on one paper tape.

Items 6, 7, 8, 12 and 13 are desired on one paper record, each equal displacement.

Items 9, 10, 11 and 14 are requested on one real time paper record, each equal displacement.

Paper records at 4 inches per second or slower should include timing Format C and those at faster than 4 inches per second should have timing Format B.

Range User will provide a decommutator to be used at the Launch T/II Station. CRR is requested to provide an eight channel Sanborn recorder for recording seven commutator functions on the 70 kc channel and IRIG "C" timing in Real Time. User will supply an operator for the decommutator.

See Appendix X for playback paper record requirements.

15 Nov. 1963

OR

2.3.2 Special Requirements (cont'd.)

Real Time Telemetry Display:

See paragraph 1.6 for User Telemetry Display requirements.

Calibration:

(a) 219.5 mc link: The event channels, IRIG #1-4, should be calibrated in terms of a 0 to 5 volt signal for $\pm 7.5\%$ deviation (0 volts corresponds to a $+7.5\%$ deviation and +5 volts to -7.5% deviation).

The calibration on the subcarrier oscillators including the 3.9 kc unit and higher is 0 to 5 volts for a $\pm 6.75\%$ deviation. (Zero level corresponds to $+6.75\%$ deviation and +5 volts to -6.75% deviation.) A Zener diode reference of +5 volts is connected to channel 2 of the commutator on the 70 kc subcarrier oscillator. This reference is also applied at 10-second intervals to the 3.9 kc, 5.4 kc, 7.35 kc, 10.5 kc, 40 kc and 52.5 kc subcarrier channels by a calibrator unit in the nose cone.

(b) Signal Strength: Calibration for the 219.5 mc link is requested in terms of 0 to 1 millivolt, applied to the receiver or pre-amplifier input. The telemetry report should include details such as receiving antenna type, gain, and polarization, pre-amplifier and/or multicoupler gain, and diversity combiner characteristics (if used). Post-flight calibration is required to coincide with radar AGC calibration and User signal strength calibration.

2.4 Other Data

Other data collected includes photographs from the parallax cameras of the star field and light on the rocket nose cone, and other records furnished by DRNL in reduced form. This data does not require processing or reduction by RFOAR.

Range User personnel assigned to instrumentation sites are as follows:

<u>NAME</u>	<u>SECURITY CLEARANCE</u>	<u>PURPOSE</u>	<u>PLACE</u>
-------------	-------------------------------	----------------	--------------

(Names, location and duties of Range User personnel will be supplied at a later date.)

15 Nov. 1963

OR

3.0 METEOROLOGICAL SERVICES

3.1 Forecasts

Data concerning launching restriction due to weather conditions may be obtained from CARDE. The following information is requested for planning and operational purposes (concerning the nose cone payload). This information should be presented to the Range User Trial Coordinator who will be responsible for informing all Range User personnel in the Fort Churchill area. DRNL should keep the personnel at the outlying camera sites informed of anticipated weather conditions.

3.1.1 Long Range

3-5 day outlook of general weather conditions, particularly temperature, wind, and cloud cover.

3.1.2 Planning

30-72 hour forecasts (wind, cloud cover, temperature).

3.1.3 Operational

30 hour or less forecasts (wind, cloud cover, temperature). It is requested that the RFOAR meteorologist be available for consultation from T-12 hours to launch.

3.2 Observations

Rawinsonde data on wind, temperature, humidity, pressure and density is requested as close to the firing time and launch site as possible. Standard surface measurement of wind velocity, temperature and pressure are also requested commencing at T-6 hours at one-hour intervals.

It is likely that wind data will be requested to at least 2000 feet at hourly intervals from T-6 to launching for use of Range wind predictor and Range Safety Officer.

15 Nov. 1963

OR

3.3 Minima

The camera sites at O'Day and Belcher must be clear of cloud cover and ground haze for a clear view of the aurora. It is essential that visibility be at least 7 miles, and that the aurora be visible from the launch site and camera sites at launch time.

15 Nov.1963

OR

4.0 SUPPORT INSTRUMENTATION

4.1 Communications - General

Intercom communications (User net) are requested between the preparation area, project scientists' observation station, blockhouse, hazardous assembly, launch bay, and DRNL. It is understood that DRNL will provide communication by SSB to the camera sites at Belcher and O'Day. DRNL is also requested to provide radio communication with PARL.

A User hard line is requested between the blockhouse and two locations at the Operations Building: (a) the Project Scientists' observation station and (b) the User preparation area adjacent to the telemetry station. This will be used primarily for conferences between the Project Scientist and the User Vehicle Controller.

None of the transmissions need be recorded.

4.2 Radio

The Frequency Control and Analysis Facility should be available to monitor radio frequency transmissions during the test.

4.3 Wire

4.3.1 MOPS

It is requested that a loudspeaker on the missile operations intercom should be located near the checkout and control console provided by the Range User. A clock or digital display of the countdown time is also requested near the control console, in the User area in the Operations Building and the observation station. Wire communication with DRNL is required for relaying the countdown to the camera sites from T-5 minutes to the termination of the voice count.

A wire line to DRNL is requested for transmission of Range timing for time correlation of ground measurements made by DRNL with vehicle data.

15 Nov. 1963

OR

4.3.2 Telephone

Telephone for Range User personnel are requested at the following locations:

- a) DRML
- b) User Preparation Area in Operations Building
- c) Project Scientists' Station
- d) User Area in Blockhouse.

Charges for long distance service will be borne by the Range User.

4.3.3 Umbilical Cable

It is understood that the cabling from the blockhouse to the Universal Launcher consists of 70 No. 16 conductors and 70 No. 6 conductors for nose cone instrumentation monitoring and control by Range User as well as 40 No. 6 conductors for use by RFOAR for radar beacon and Dovap transponder control and monitoring. Range User will supply junction boxes for use at each end of the RFOAR umbilical cable system for connection to the User control console and to the vehicle pull-away connector. Each of these junction boxes will contain a patch board panel to allow rapid changes to be made in umbilical connections for different rockets.

4.4 Timing

Timing on the magnetic tape records is requested to be:

- a) IRIG Format "B", 100 pps with a 1 kc carrier, and
- b) IRIG Format "C", 2 pps with a 100 cps carrier.

First motion is to be indicated by an increase in the amplitude of the timing pulses. It is assumed that timing commences with calibration at T - 0:02.

Timing Format C is requested on all paper records at 4 inches per second or slower. Timing Format B is requested on all paper records at 4 inches per second or higher.

15 Nov. 1963

OR

4.5 Sequence

<u>NO.</u>	<u>FUNCTION</u>	<u>INTERVAL</u>		<u>REMARKS</u>
		<u>START</u>	<u>STOP</u>	
1	Ignition Pulse	T-0	--	--

Voice Countdown

The voice time count is requested at each minute from T - 00:05:00 to T - 00:01:00, at 10-second intervals from T - 00:01:00 to T - 00:00:10, at 1-second intervals from T - 00:00:10 to T + 00:00:10, at 10-second intervals from T + 00:00:10 to splash, and at 1-second intervals from T + 00:00:35 to T + 00:00:45.

4.6 Visual Countdown and Status Indicators

<u>NO.</u>	<u>FUNCTION TO BE DISPLAYED</u>	<u>TYPE INDICATOR</u>	<u>INTERVAL</u>		<u>REMARKS</u>
			<u>START</u>	<u>STOP</u>	
1	Range Countdown	Clock, digital preferred	T-6 hrs.	T+10 mins.	To be easily viewed from payload control console. Same facility desired in nose cone preparation area, in Operations Building, and Project Scientists' Station.

4.7 Data Handling

Range User will obtain all data produced by the CRR from Detachment #2, USAF/OAR, Fort Churchill.

15 Nov.1963

OR

4.8 Command Control

No command control or destruct system will be used.

4.9 Other Support Instrumentation

It is requested that sound ranging equipment be used to determine impact coordinates. Recovery is not required.

15 Nov.1963

OR

5.0 MATERIAL AND SERVICES

5.1 Services

5.1.1 Power

115V, 60 cps power is requested in assembly area and blockhouse. This should consist of one 30 amp. service outlet and three 15 amp. outlets. Each service is to be independently fused.

5.1.2 Food Services

Ten NRC personnel will require food services for approximately one month. DRNL will be requested to arrange for this service and accommodation.

5.1.3 Fire Protection

No additional fire protection services are anticipated in excess of normal.

5.1.4 Medical Service

None required in excess of normal.

5.1.5 Guards and Security - NR

5.1.6 Pad Services and Engineering

A complete "dress rehearsal" of the launching is requested on the day previous to the scheduled firing. This will include installing the rocket on the launcher, performing all payload checks, and testing of all communications. All personnel and services involved in an actual launching should be involved in this system test.

5.1.7 Water - NR

5.1.8 Survey

Belcher and O'Day height finding stations relative to launcher.

15 Nov.1963

OR

5.1.9 Air

A supply of clean, dry air to pressurize the conical section of the nose cone to about 5 p.s.i.g. is requested to be available in the hazardous assembly. The fitting on the nose cone will be similar to that used on automobile tires. The Range User will supply a suitable pressure gauge.

5.2 Vehicles and Ground Handling Equipment

5.2.1 Vehicles

The rocket and all necessary hardware will be supplied to RFOAR by NRC or CARDE.

5.2.2 Ground and Heavy Equipment

RFOAR should supply suitable dollies and lifting equipment for movement of the motor and complete rocket in the assembly area and at the launcher.

5.2.3 Search Lights and Floodlights - NR

5.2.4 Other Equipment

RFOAR is requested to supply equipment for, and obtain all up weight and centre of gravity of the nose cone and of the complete vehicle. This may be done during the launch "dress rehearsal"

5.3 Propellants, Gases, Chemicals - NR

5.4 Chemical and Physical Analysis - NR

5.5 Bioscience - NR

5.6 Test Instrument Maintenance and Calibration

RFOAR is requested to supply the calibration for the signal strength records of the 219.5 mc link, and of the AGC data on the radar data link. The radar AGC data may be calibrated in terms of relative db (although desirable, not necessarily an absolute calibration).

15 Nov. 1963

OR

5.7 Climatic Clothing Requirements

DRNL will be requested to supply the climatic clothing requirements of Range User personnel.

15 Nov. 1963

OR

6.0 TRANSPORTATION LOGISTICS

DRNL is requested to inform W.L. Haney by Telex or wire communication of the arrival of check-out equipment at CRR.

6.1 Surface

6.1.1 Personnel

On occasion, Range User personnel may wish to use the bus service provided by the Range Contractor for transport of range personnel to and from the launch site.

DRNL will be requested for the loan of two station wagons or panel trucks for the full-time use of the User personnel attached to this program. Drivers will have DND operator's permits.

RFOAR is requested to have two bicycles available at the blockhouse for use by Range User personnel proceeding to and from Hazardous Assembly and the Launch Bay.

6.1.2 Cargo

DRNL is requested to provide for the unloading and transport to the range of the nose cone and check-out equipment. RFOAR is requested to provide for the unloading and transport to the range of the motor and fin assembly. The motor and fin assembly will arrive at Fort Churchill by air transport. Other equipment will probably arrive by air but may be shipped by rail.

It is assumed that any special equipment, such as may be required for vehicle assembly, fin alignment, etc., will be supplied by CARDE.

a) Motor in crate: 3000 lbs., 24 in. x 30 in. x 17 ft.

b) Fin assembly in crate: 300 lbs.

c) Check-out equipment: Estimate is for about 60 wooden boxes, each weighing between 20 and 200 lbs. Total weight about 6000 lbs.

15 Nov. 1963

OR

6.1.2 Cargo (cont'd.)

d) Nose cone and payload in crate: Approximately 350 lbs., 24 in. x 24 in. x 10 ft.

Item (c) includes equipment used in other launch programs sponsored by NRC during the same time period.

Item (d) will arrive at Fort Churchill by air about F-7 on the same plane as the main group of Range User personnel.

DRNL is requested to provide for loading and transport of User check-out equipment to railway depot at conclusion of rocket firings.

6.2 Air - NR.

15 Nov.1963

OR

7.0 RECOVERY

No recovery is required.

15 Nov.1963

OR

8.0 AIRCRAFT AND SEACRAFT

A helicopter for up to five men and as much as 500 lbs. of equipment may be required for transport to Belcher and O'Day.

15 Nov. 1963

OR

9.0 DATA PROCESSING AND DISPOSITION

9.1 General Information

After the one-year period of retention, all raw data is to be released to NRC (Radio & Electrical Engineering Division, Attention: Mr. W.L. Haney).

After the two years retention period, all file copies of the Flight Test Report are to be released to NRC (Radio and Electrical Engineering Division, Attention: Mr. W.L. Haney).

If all NRC personnel have departed from the range before data is available, data should be forwarded to NRC (Radio and Electrical Engineering Division, Attention: Mr. W.L. Haney).

9.2 Disposition of Data

<u>ITEM NO.</u>	<u>DESCRIPTION</u>	<u>ORIG.</u>	<u>CYS.</u>	<u>TIME REQUIRED</u>	<u>FINAL RECIPIENT</u>	<u>AGENCY TO PICK UP DATA</u>	<u>TYPE OF PRESENTATION</u>	<u>REMARKS</u>
9.2.1 Metric Data								
9.2.1.1 Launch to Impact								
1	Position		1	T+6H	CARDE	NRC	R-PLOT) note (a)
		1	1	T+6H	NRC	NRC		
2	Position,		5	T+30 CD	NRC	NRC) F-TRPT) and) F-PLOT)	note (b)
	Velocity,		1	T+30 CD	CARDE	NRC		
	Trajectory Angles							
	(X,Y,Z,VX,VY,VZ, VS,θ,φ)							
9.2.1.2 Impact								
3	Impact		1	T+10	CARDE	NRC) F-FRPT)	
	Coordinates		1	T+10	NRC	NRC		

Note (a) - Real time plotting board data of range, azimuth, and elevation is requested.

(b) - This report should include tabulated data and plots of position, velocity, and trajectory angles with time. The method of smoothing data should be explained.

15 Nov. 1963

OR

9.2 Disposition of Data (cont'd.)

ITEM NO.	DESCRIPTION	ORIG.	CYS.	TIME REQUIRED	FINAL RECIPIENT	AGENCY TO PICK UP DATA	TYPE OF PRESENTATION	REMARKS
9.2.2 Photography								
4	Still Photos and Documentary Film		1	T+15	NRC	NRC	R-PHOTO	Note (c)
9.2.3 Telemetry								
9.2.3.1 Recording								
5	Magnetic tape recording of telemetry data	1	1	T+5 CD	NRC	NRC	R-MAGT	5.2.1.1(3)
				T+5 CD	NRC	NRC	R-MAGT	5.2.1.2(3)
				T+5 CD	NRC	NRC	R-MAGT	5.3.1.3(3)
9.2.3.2 Special Requirements								
6	Real time paper records	1		T+12 H	NRC	NRC	R-GRAF	See Appendix
	Playback paper	1		T+2	NRC	NRC	R-GRAF	
9.2.4 Other Data - DRNL								
7	Magnetic recording of voice countdown, Records and reduced data from DRNL observations	1		T+15CD	NRC	NRC	F-FRPT and R-MAGT	
9.3 Meteorological Data								
8	Report on all requested observations	1	1	T+15	CARDE	NRC	} F-FRPT	
		3		T+15	NRC	NRC		

Note (c) - One negative of all photos (still and movie documentary) and one copy of the processed documentary are requested.

15 Nov. 1963

OR

9.2 Disposition of Data (cont'd.)

<u>ITEM NO.</u>	<u>DESCRIPTION</u>	<u>ORIG.</u>	<u>CYS.</u>	<u>TIME REQUIRED</u>	<u>FINAL RECIPIENT</u>	<u>AGENCY TO PICK UP DATA</u>	<u>TYPE OF PRESENTATION</u>	<u>REMARKS</u>
-----------------	--------------------	--------------	-------------	----------------------	------------------------	-------------------------------	-----------------------------	----------------

9.3 Meteorological Data (cont'd.)

9	Final report on all requested observations		3	T+30 CD	NRC	NRC	F-FRPT	
---	--	--	---	---------	-----	-----	--------	--

9.4 Support Instrumentation - NR

9.5 Material and Services Report - NR

9.6 Transportation Reports

10	Receiving and Shipping Report		1	T+30	NRC	NRC	F-FRPT	All equipment in and out of Fort Churchill
----	-------------------------------	--	---	------	-----	-----	--------	--

9.7 Recovery Reports - NR

9.8 Aircraft Reports - NR

15 Nov. 1963

OR

10.0 FACILITIES

10.1 Facilities - General

(1) Storage for equipment crates of about 200 sq. ft. area by 8 ft. high. It is requested that no Range User equipment be stored where the equipment temperature may become lower than 0°F.

(2) Preparation area of about 300 sq. ft. for nose cone assembly and check-out.

(3) Hazardous storage for the motor, igniter and squib is requested.

(4) About 100 square feet of space is requested in the blockhouse for the payload check-out console and associated equipment (power supplies, battery chargers, receiver, discriminators, display oscilloscopes, etc.).

(5) Office space and telephone at DRNL.

(6) An observation station beside the Operations Building for use of the Project Scientist. A telephone, an intercom on the User net, and a hard line to the User area in the blockhouse are desired at this station; also digital clock of range countdown.

These facilities are requested for the period March 26th to April 20th, 1964.

15 Nov. 1963

OR

11.0 RANGE SAFETY

RFOAR is responsible for all range safety.

15 Nov. 1963

OR

10.0 FACILITIES

10.1 Facilities - General

(1) Storage for equipment crates of about 200 sq. ft. area by 8 ft. high. It is requested that no Range User equipment be stored where the equipment temperature may become lower than 0°F.

(2) Preparation area of about 300 sq. ft. for nose cone assembly and check-out.

(3) Hazardous storage for the motor, igniter and squib is requested.

(4) About 100 square feet of space is requested in the blockhouse for the payload checkout console and associated equipment (power supplies, battery chargers, receiver, discriminators, display oscilloscopes, etc.).

(5) Office space and telephone at DRNL.

(6) An observation station beside the Operations Building for use of the Project Scientist. A telephone, an intercom on the User net, and a hard line to the User area in the blockhouse are desired at this station, also a digital clock of range countdown.

These facilities are requested for the period March 26th to April 20th, 1964.

15 Nov. 1963

OR

11.0 RANGE SAFETY

RFOAR is responsible for all range safety.

CLASSIFICATION


This document is Unclassified.

RF


APPENDICES

- I. Vehicle Drawing
- II. Nose Cone Drawing
- III. Ordnance Items Location Drawing
- IV. Squib Firing Circuit
- V. Range User Equipment List, Sheets 1 and 2
- VI. Monitor and Control System Diagram
- VII. Range User Support Instrumentation Diagram, Sheet 2
- VIII. Beacon Monitor Functions on Link #1
- IX. Wire Lines to Nose Cone Assembly Area adjacent to Launch T/M Station
- X. Playback Paper Record Requirements


APPENDIX I

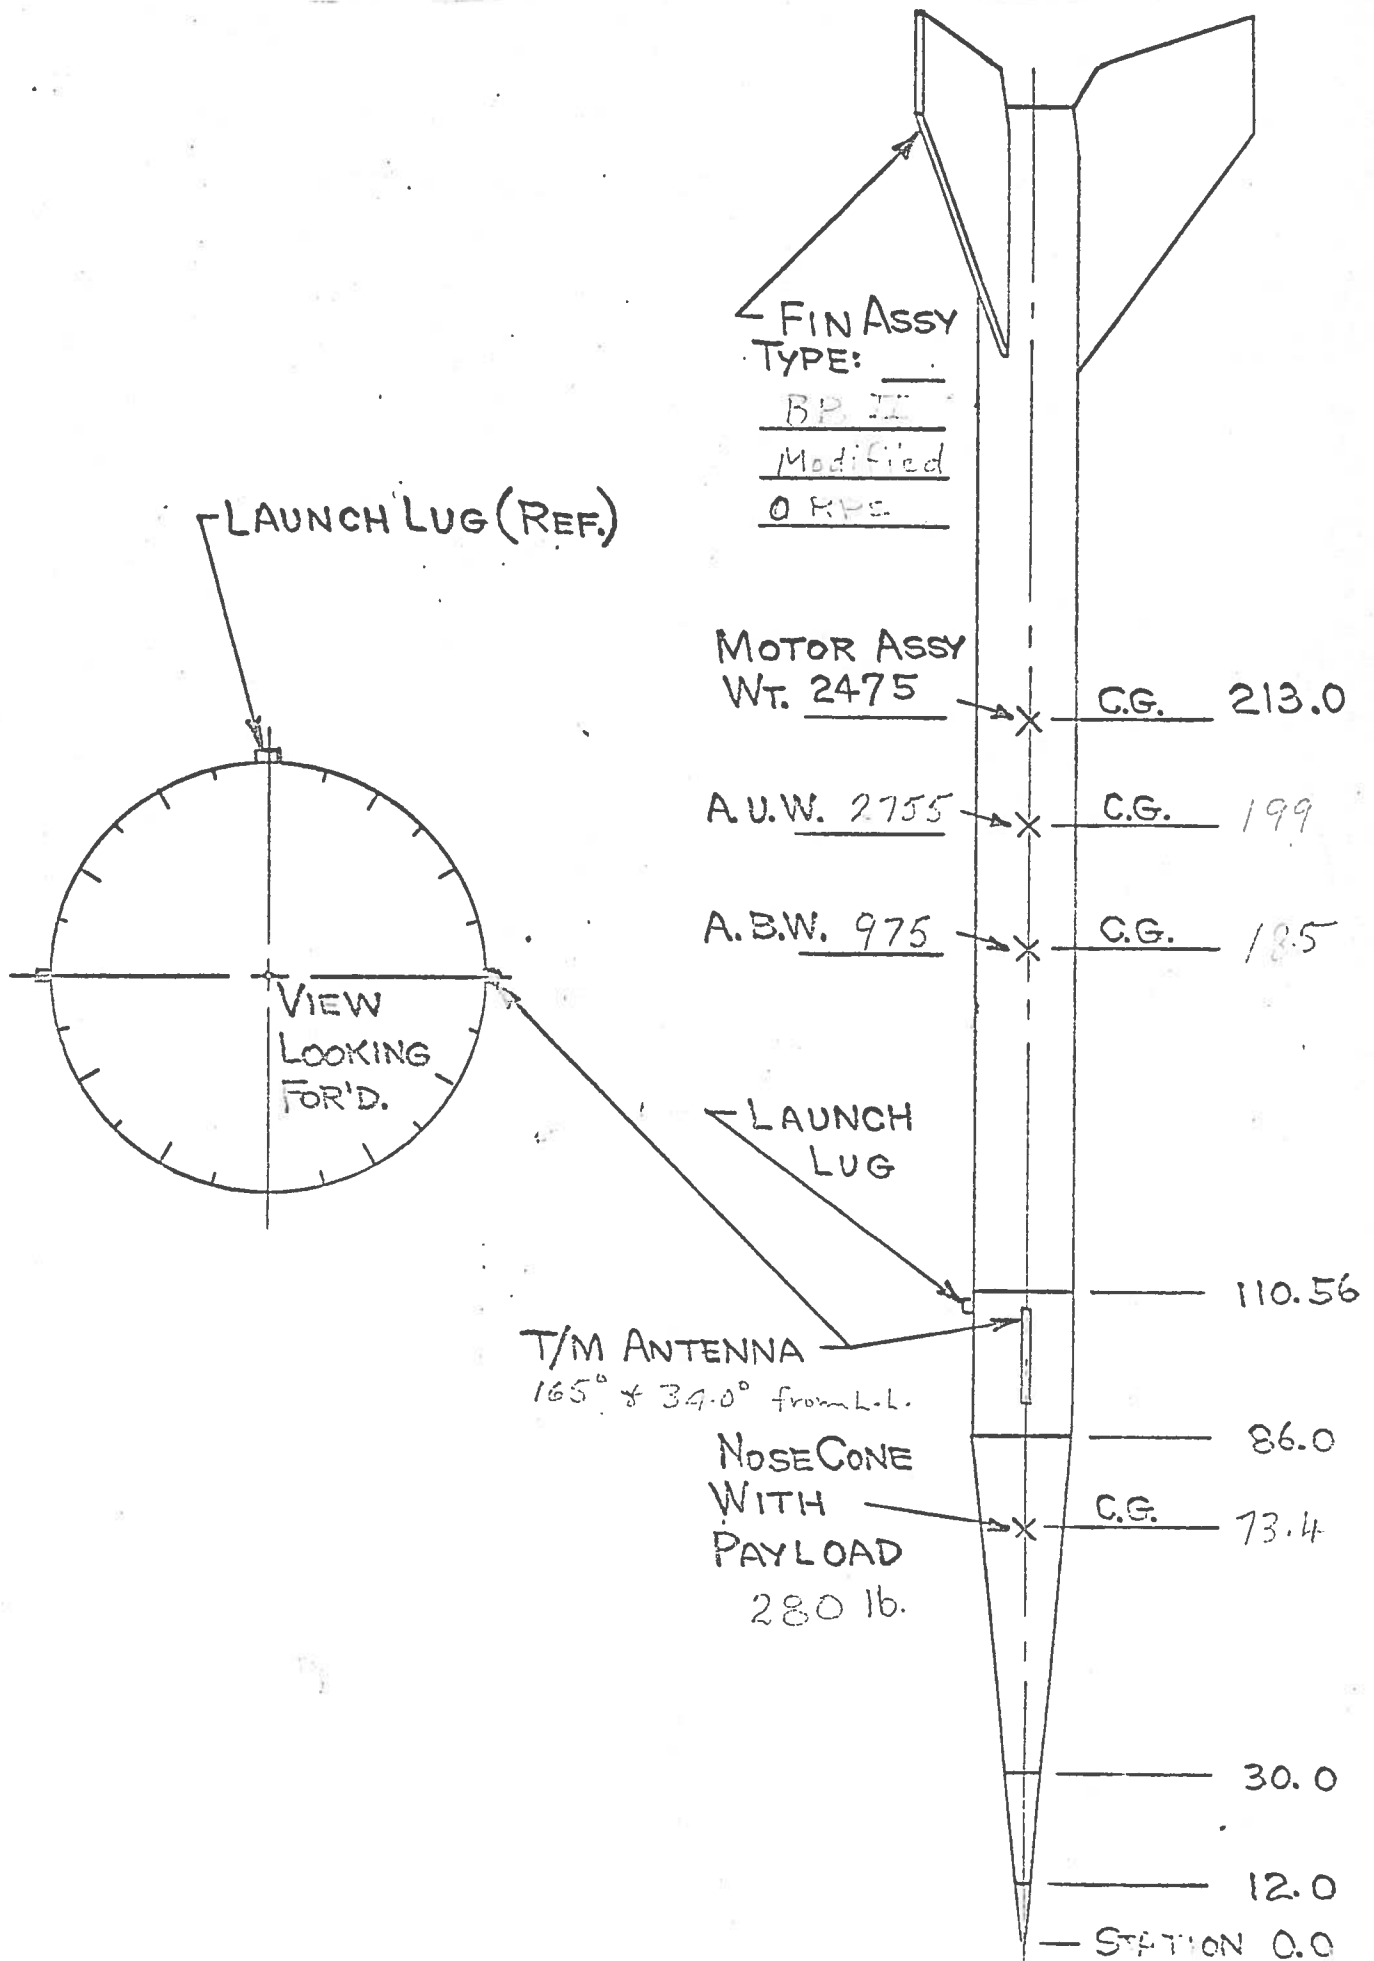


APPENDIX II

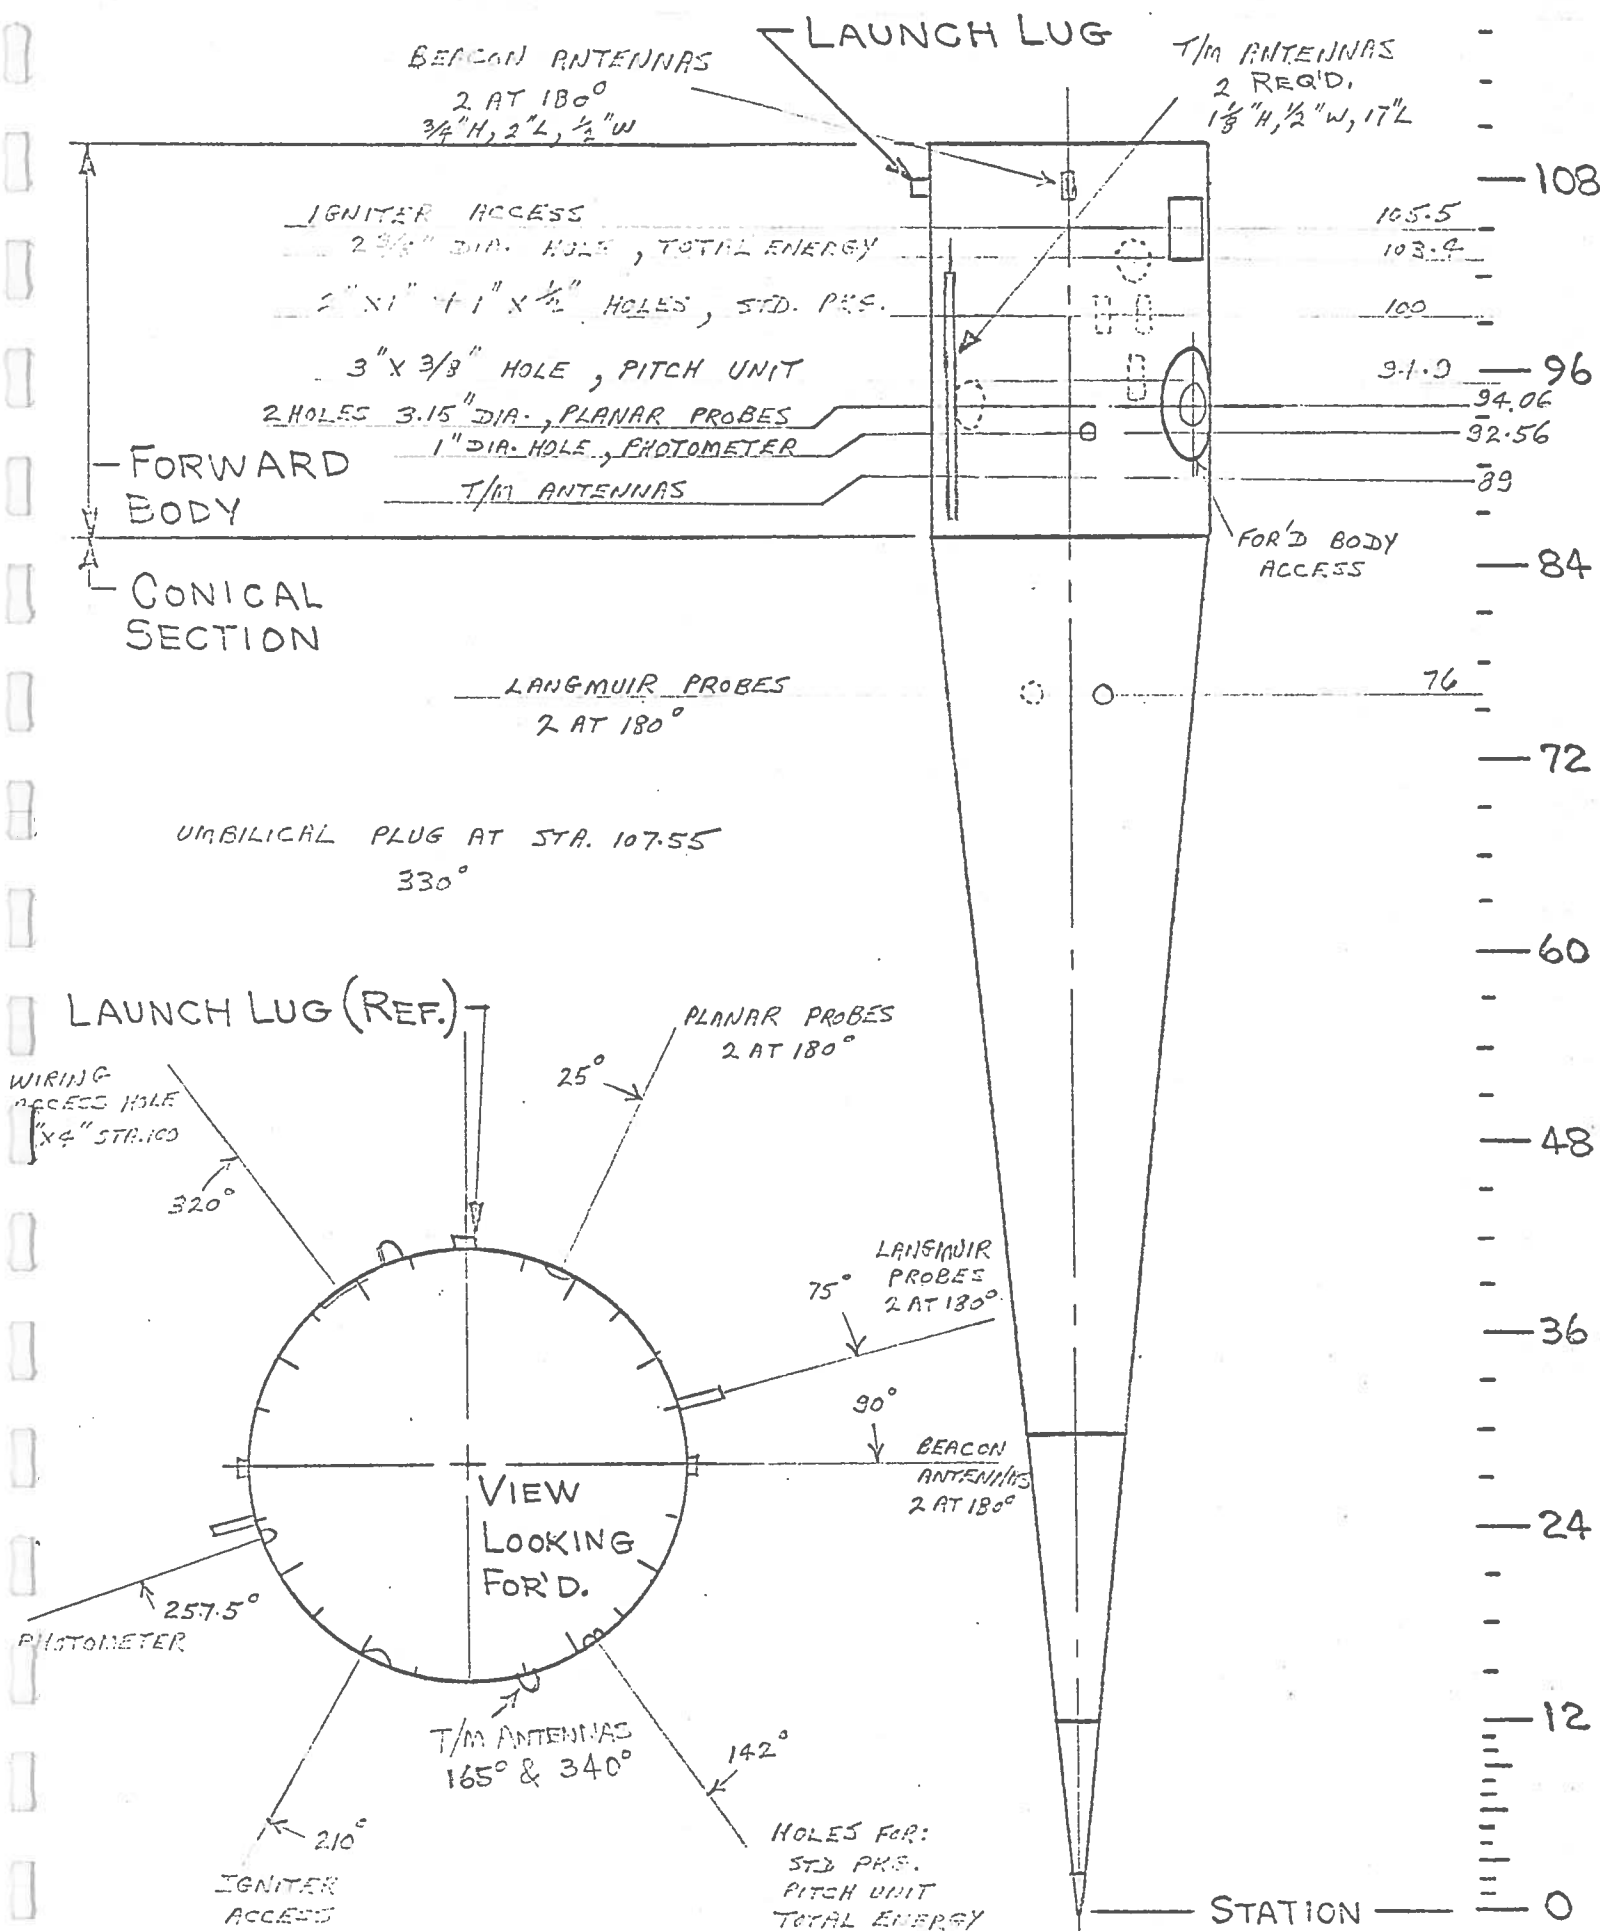

APPENDIX III

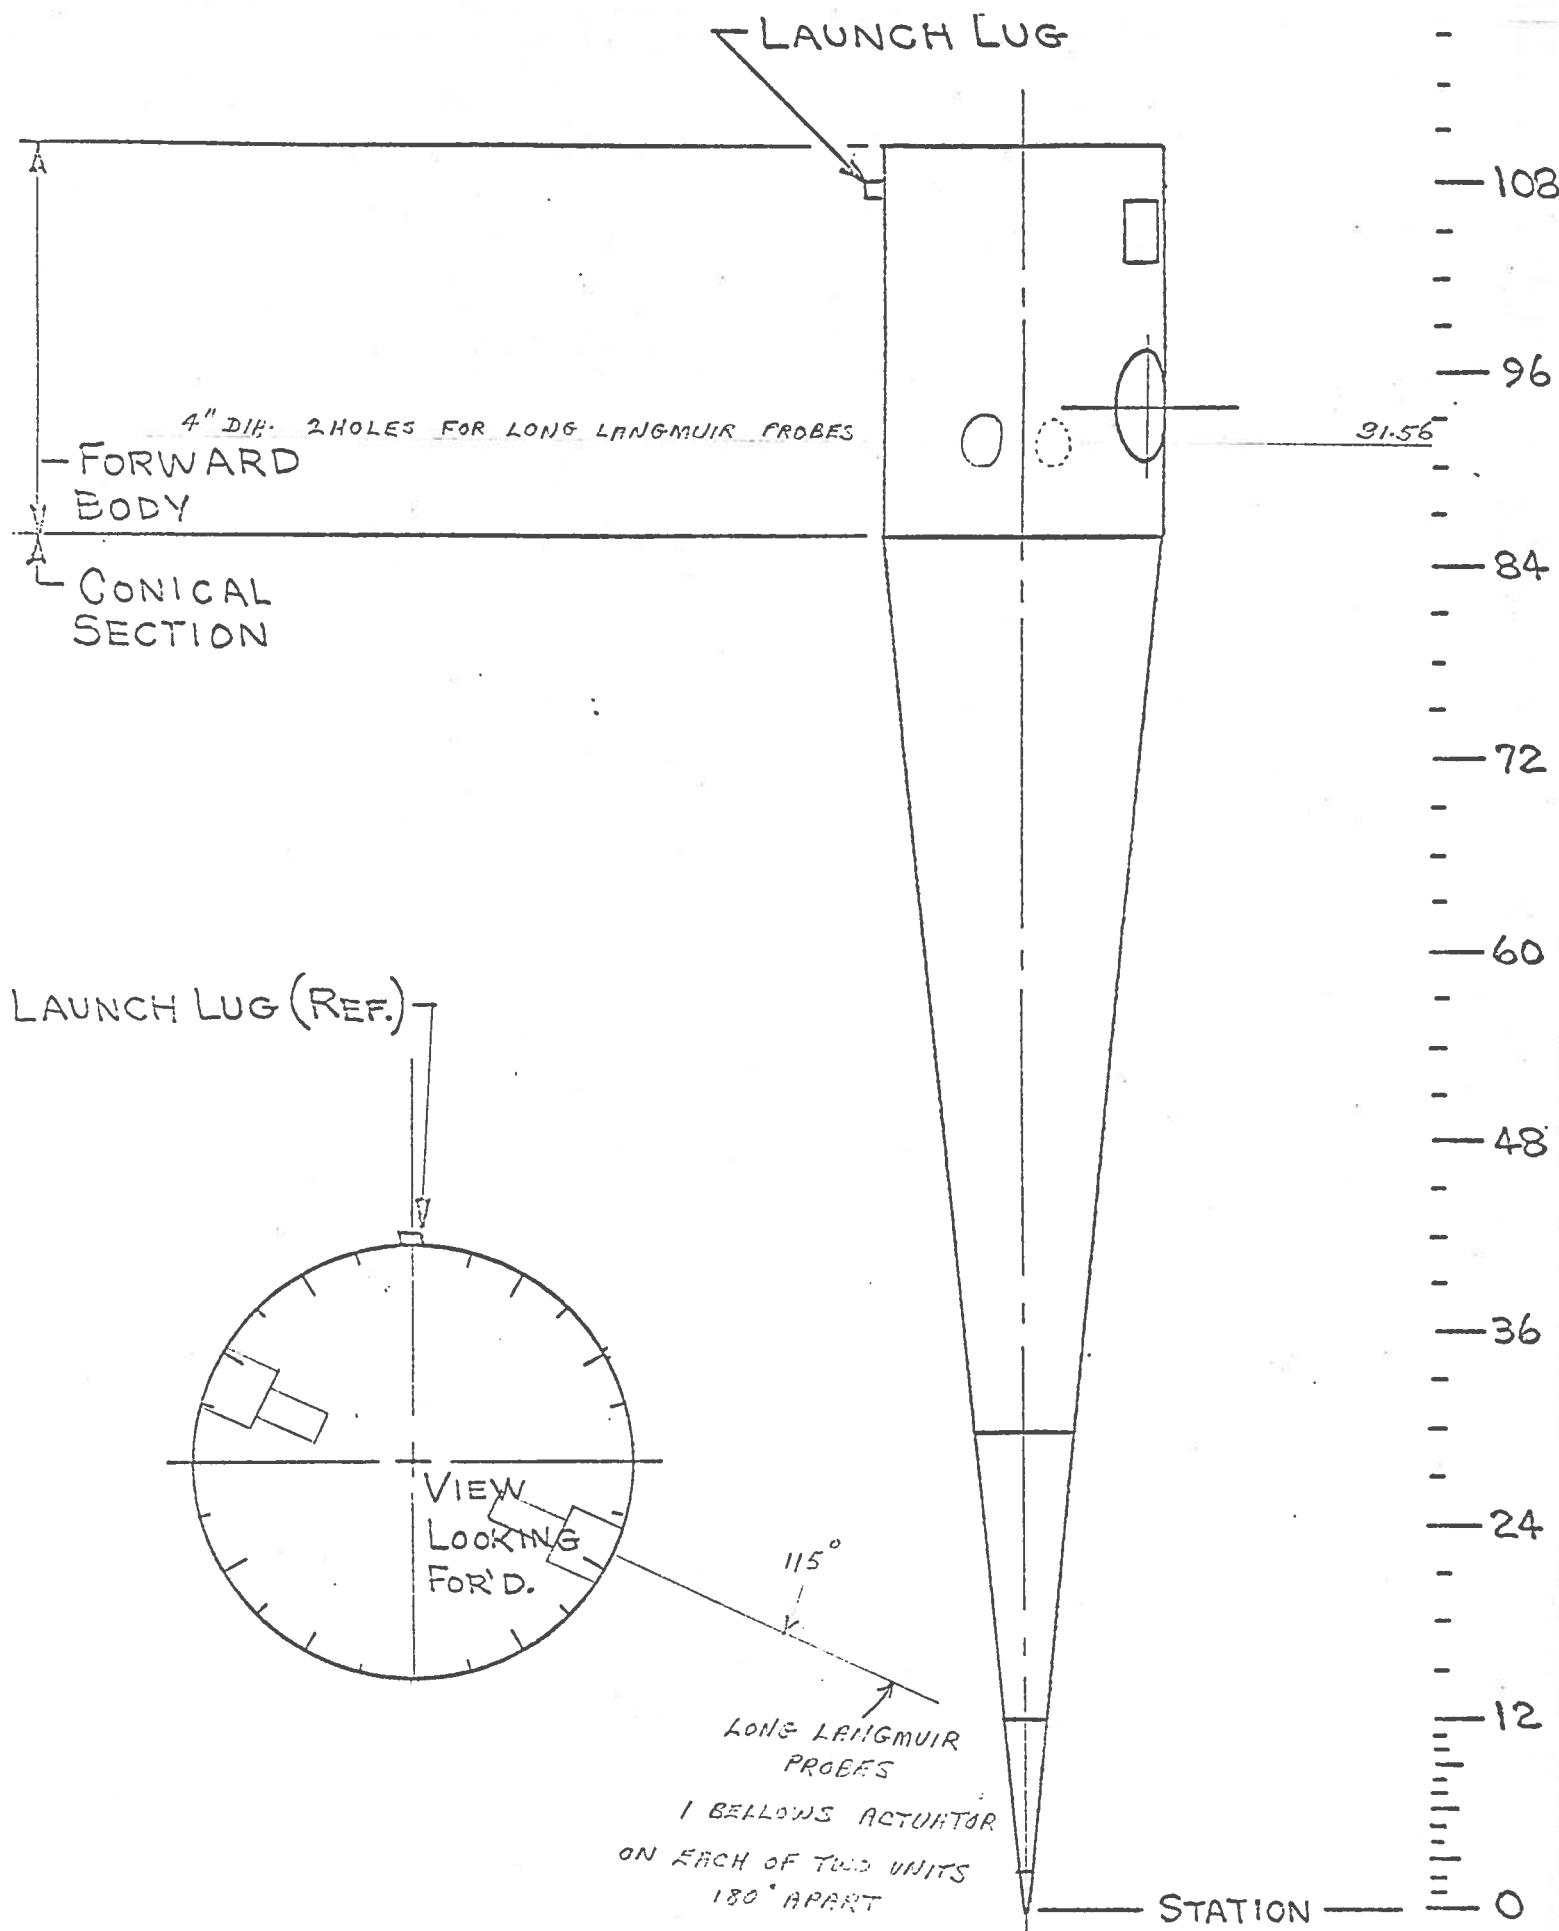

APPENDIX IV

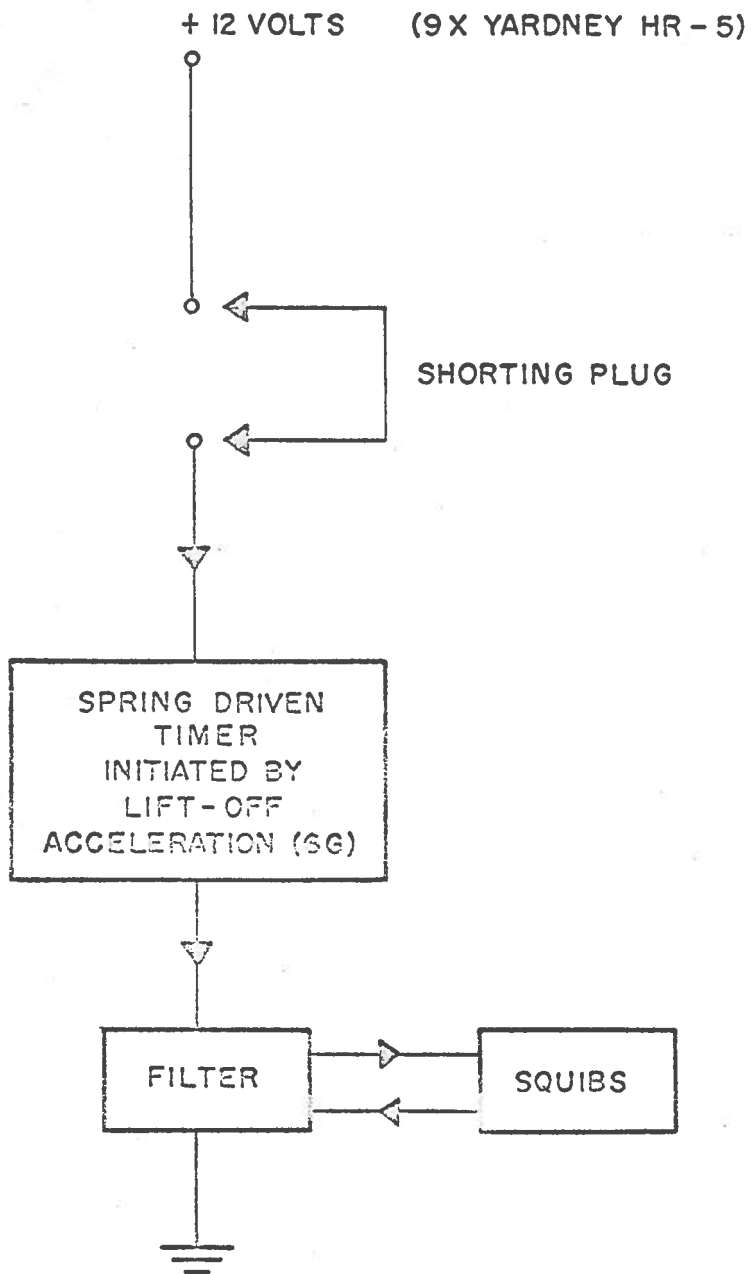

SQUIB FIRING CIRCUIT

APPENDIX V

PRELIMINARY LIST OF RANGE USER EQUIPMENT FOR FIRINGS AT FORT CHURCHILL RESEARCH RANGE

Panoramic Telemetering Indicator, Model TMI-Ib
Telemetering Test Oscillator, HP Model 200TR
FM-AM Signal Generator, Boonton Model 202G
Telemetry Receivers, Nems Clarke Model 1433 (two)
Telemetry Receivers, Nems Clarke Model 1432
Telemetry Receivers, Nems Clarke Model 1501A
Telemetry Receivers, Defence Electronics Model TMR-2A
Oscilloscope, 5", HP Model 122AR
Oscilloscope, 5", Tektronic Model 536
Oscilloscope, 3", Tektronic Model 310
Oscilloscope, 3", Tektronic Model 316
Oscilloscope, 17", I.T.T. Model 1735-0
Counter, Computer Meas. Model 225-C
V.T.V.M., HP Model 400 HR
Voltmeter, Digital, HP Model 405 CR
Telemetry Calibrator, Dynatronics Model 612
Tunable Discriminator, EMR Model 97H
Variable Filter, EMR Model 95F
Power Supplies 0-36V, Harrison Labs Model 808A
Power Supplies 0-36V, Harrison Labs Model 809A
Power Supplies 0-36V, Harrison Labs Model 814A

(cont'd.)

Spectrum Display, Nems-Clarke Model 200-3

Multicoupler, Nems-Clarke Model MC-406-45-237


Pre-amplifier (RF), Nems-Clarke Model PR-203-45-237

Audio Amplifier, Heathkit Model EA-3

Subcarrier Oscillators, antennas	}	Range User Support Instrumentation
S-band receiver, camera, etc.		

Control & Monitor Console, Meter	}	Range User Control and Monitor Instrumentation
Bank, etc.		


Decommutator, Arnoux Type TDS-300

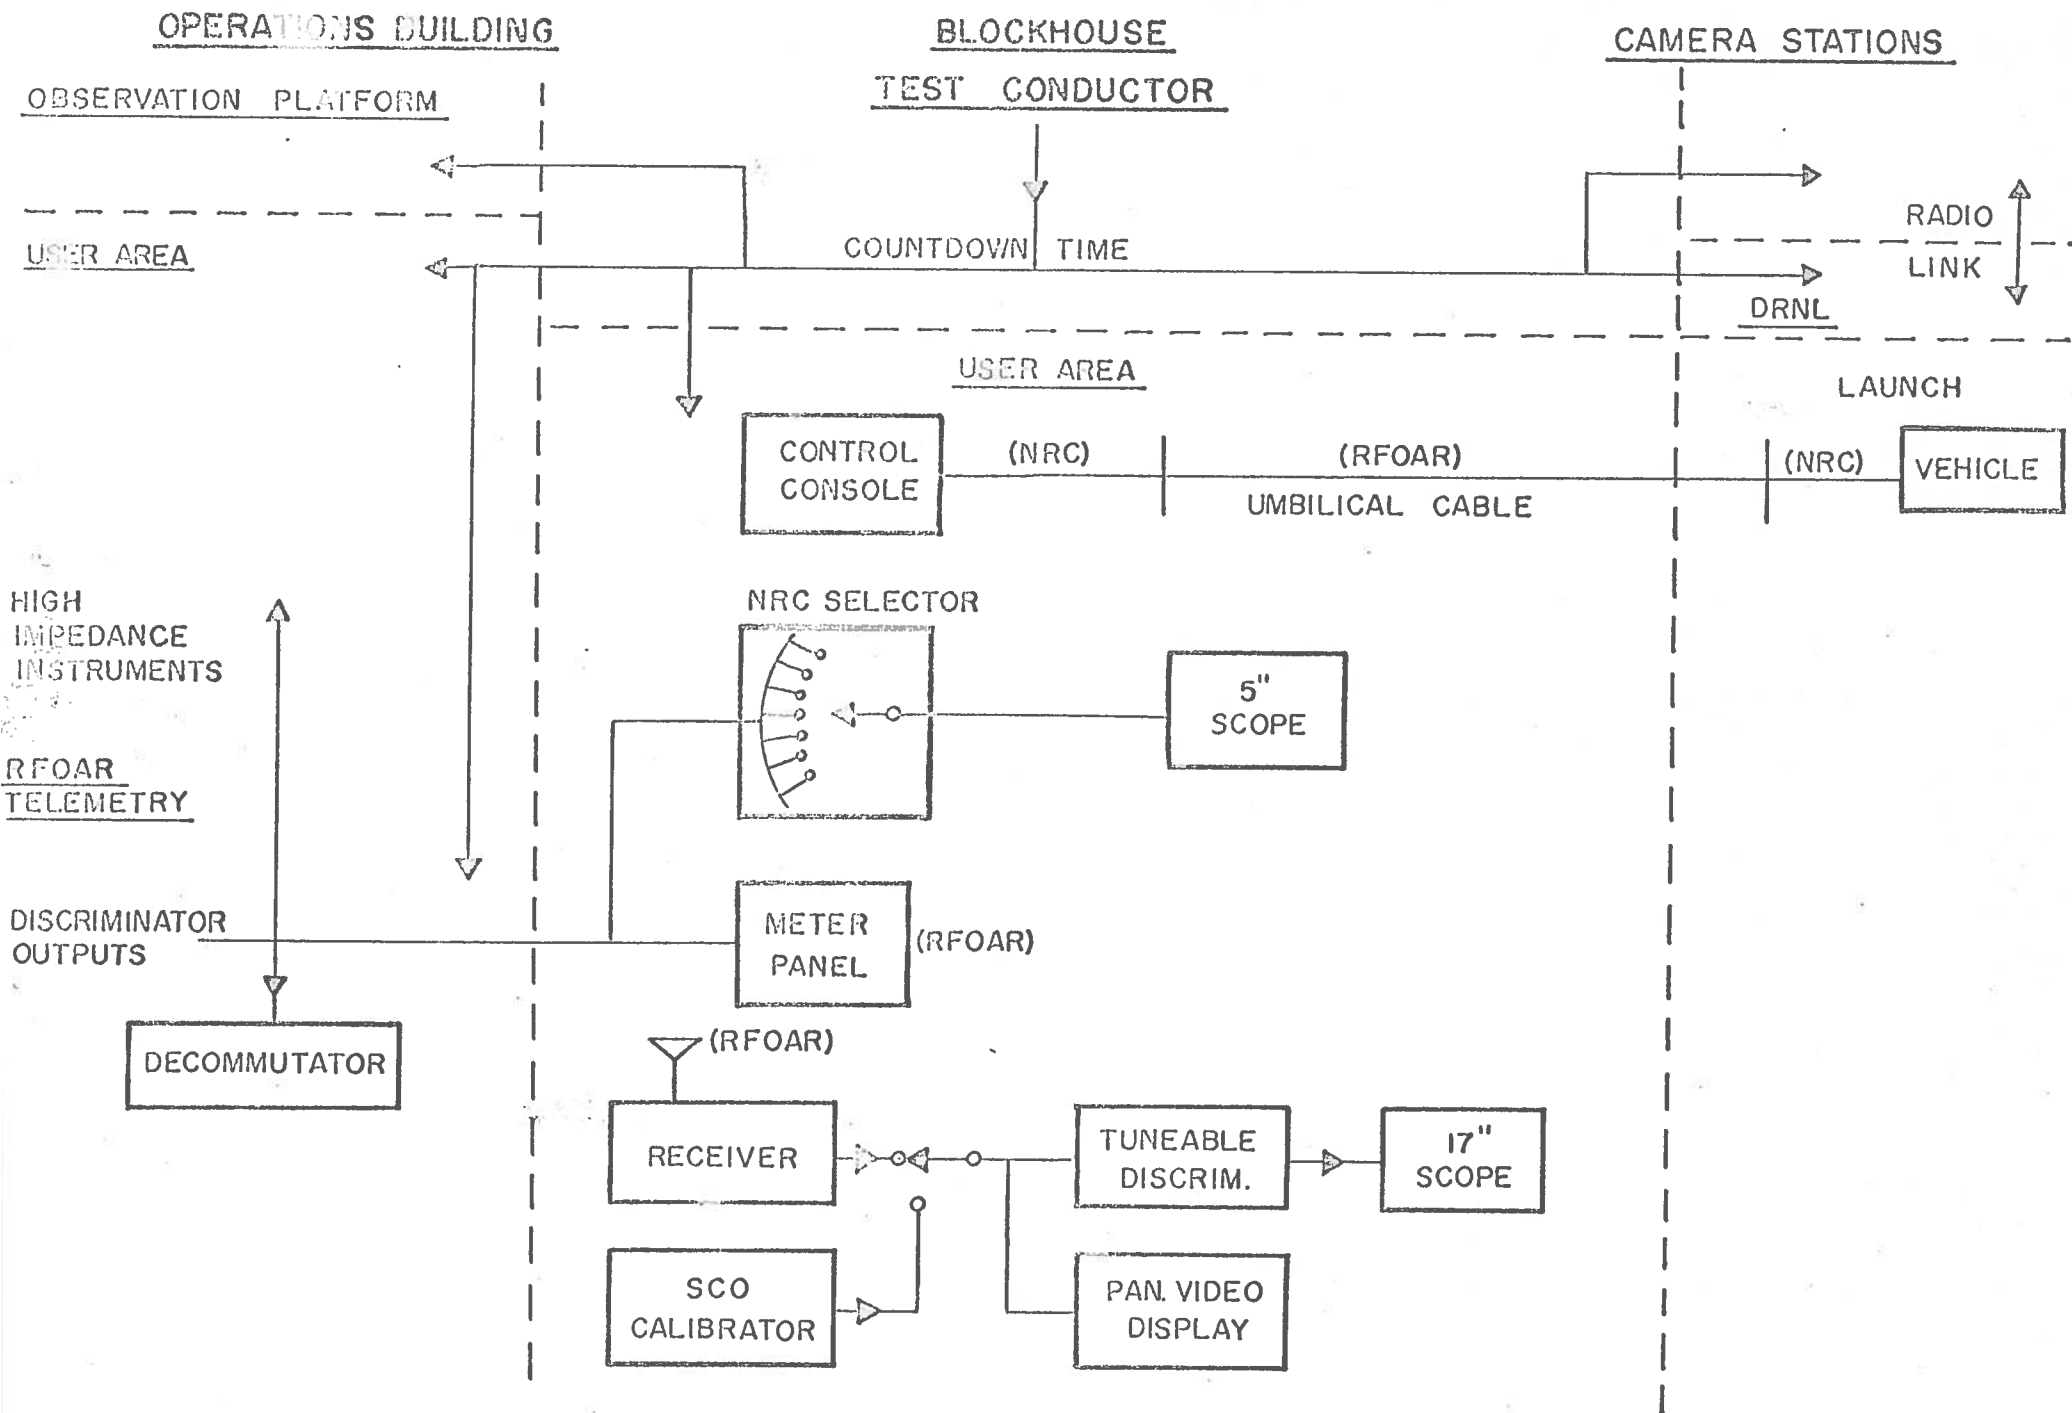

APPENDIX VI MONITOR AND CONTROL SYSTEM

DPN-41 RADAR BEACON MONITOR

FUNCTIONS

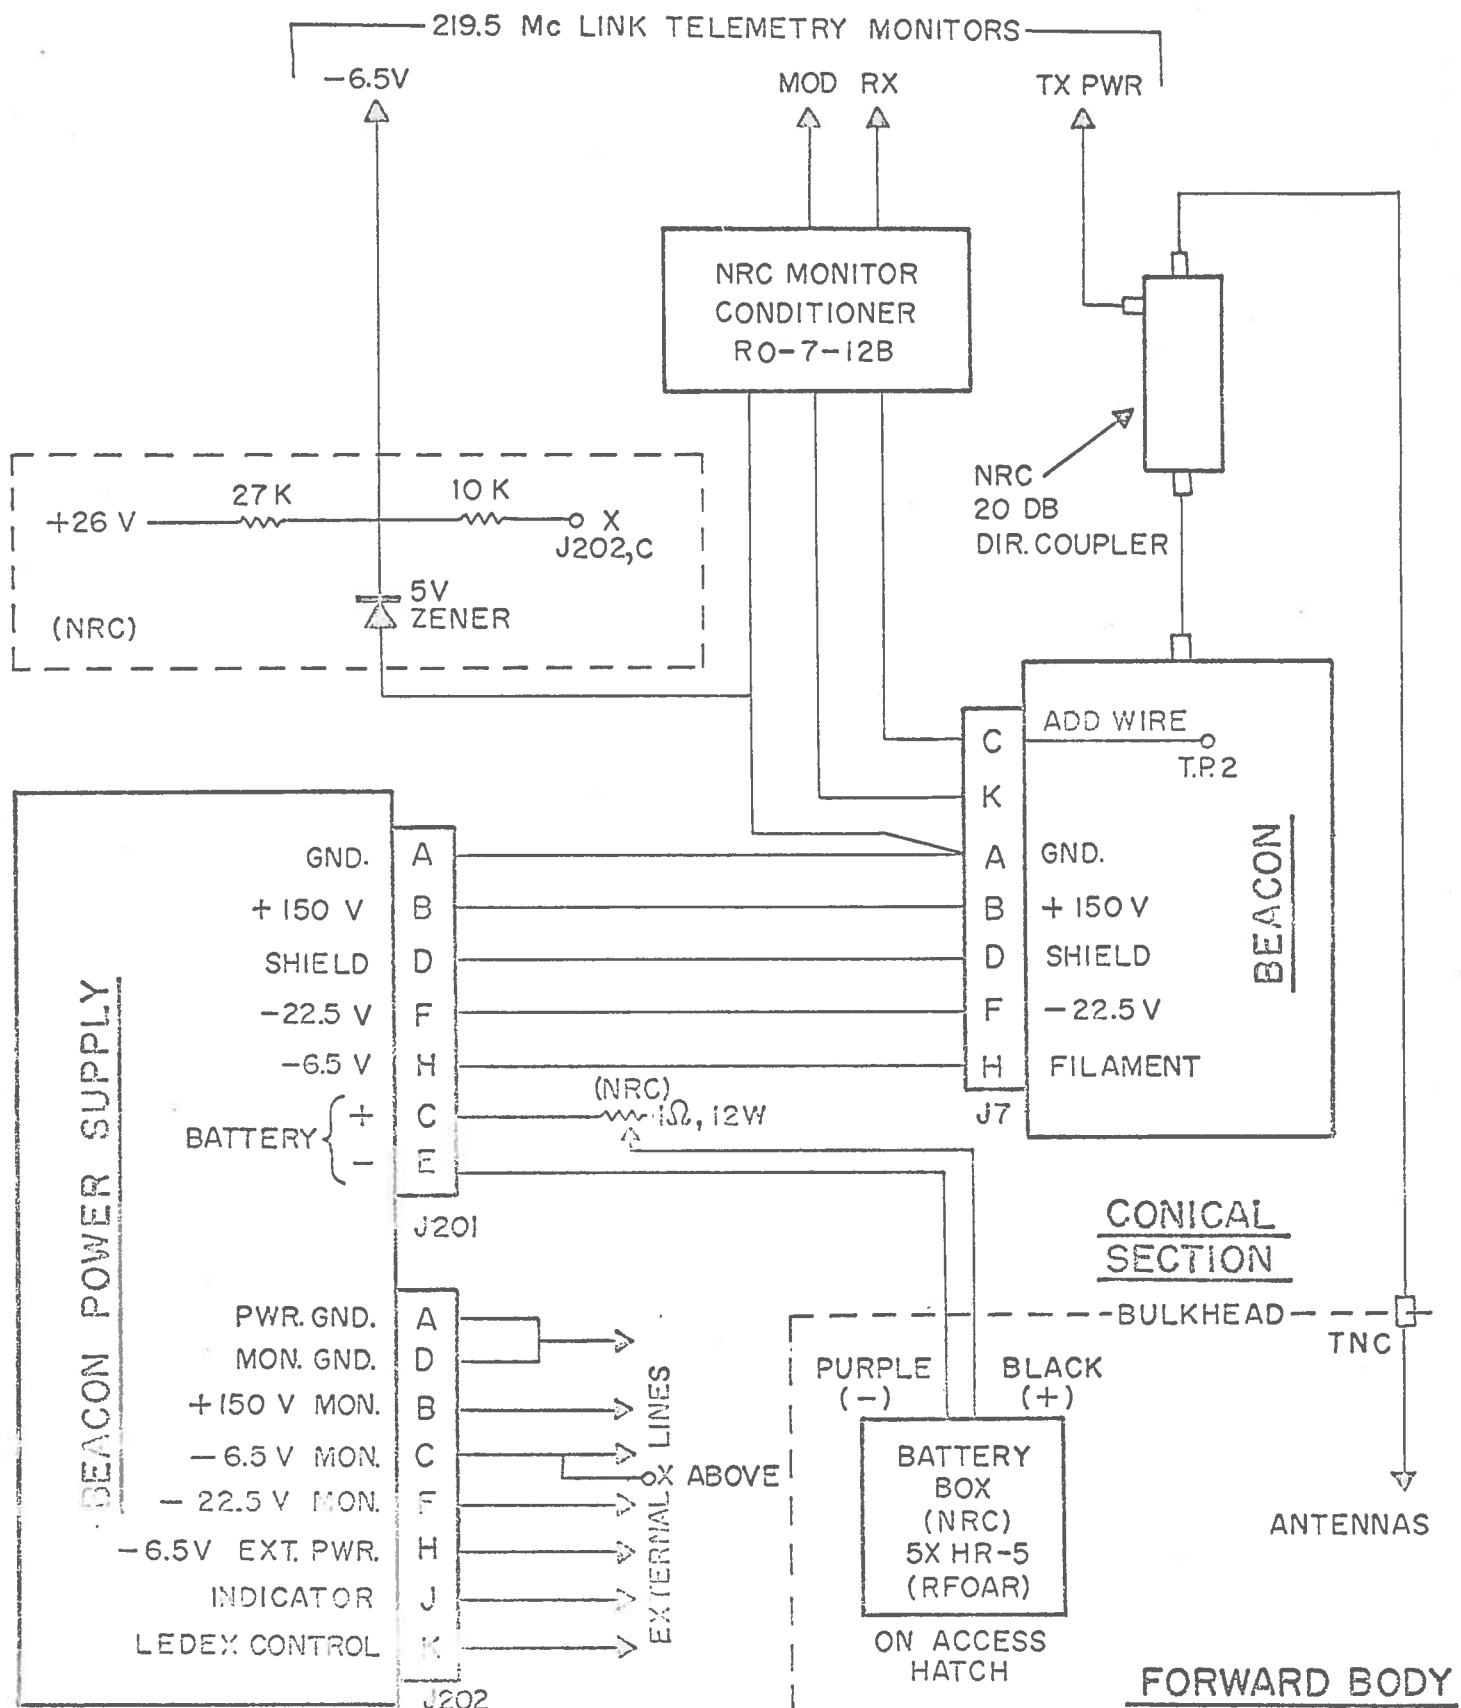

WIRE LINES TO NOSE CONE ASSEMBLY AREA ADJACENT TO LAUNCH T/M STATION

(Revised 20 Feb. 1964)

CONNECT TO:

AAII 43

(8) RG-3/U, Type "W"
(58) RG-58/U, Type "W"

5.0 Kc DISC.	10	○
7.5 Kc DISC.	20	○
7.5 Kc DISC.	30	○
10.5 Kc DISC.	40	○
DISC.	50	○
12 Kc DISC.	60	○
DISC.	70	○
DISC.	80	○
DISC.	90	○
DISC.	100	○
100.5 AGC	110	○
100.5 AGC	120	○
100.5 AGC	130	○
100.5 AGC	140	○
100.5 AGC	150	○
100.5 AGC	160	○
100.5 AGC	170	○
100.5 AGC	180	○
100.5 AGC	190	○
100.5 AGC	200	○

ROC

USER DRNL

USER

100 pps AMR

1 pps AMR

2 pps No Carrier

100 pps

2 pps

First Motion*

Hot	End.
1	○
2	○
3	○
4	○
5	○
6	○
7	○
8	○
9	○

CONNECT TO:

RADAR(8) → ARC 'S'-BAND
ANTENNA ON ROOF

TRKR2(8) → _____

TLM1 (8) → _____

TLM2 (8) → _____

TLM3 (58) → AGC TO TAPE
TRACK 2

TLM4 (58) → TIMING "B" & "C"
TO TAPE TRACK 1

TLM5 (58) → _____

TLM6 (58) → _____

TLM7 (58) → _____

TLM8 (58) → _____

PAPER RECORD # 1

TRANSMITTER NRC 1W LOCATION RADAR SITE R.F. FREQ. 225.7 MCCOPIES 1 at paper rate EQUIV. TO 40 in/SEC CEC PERMANENT
REAL TIMERECORD INTERVAL: FROM: T - 10 SEC TO: SPLASHDATA SOURCE: LAUNCH T/M TAPETIME REQUIRED: T + 2 DAYS

TRACK	SUBCARRIER FREQUENCY	FILTER	DATA FREQ.	DEFLECTION	DATA
5	#17 52.5 Kc	GAUSSIAN	1600 cps	1"	ADR SYNCH.
5	#18 70.0 Kc	"	1600 cps	1"	ADR DATA
1					IRIG FORMAT "B"
NOTE: REVERSE POLARITY OF ADR SYNCH SO					
SYNCH PULSES ARE OPPOSITE DATA PULSES					
TAPE PLAYBACK MAY BE AT REDUCED SPEED WITH APPROPRIATE DISCRIMINATORS					

APPENDIX X

PAPER RECORD # 3

AAI 43

RADAR AGC, ETC.

TRANSMITTER _____ LOCATION _____ R.F. FREQ. _____

COPIES 1 at paper rate 5 MM/SEC SANEORN

RECORD INTERVAL: FROM: T-10 SEC TO: END OF CALIB.

DATA SOURCE: LAUNCH T/M TAPE

TIME REQUIRED:

T+2 DAYS

TRACK	SUBCARRIER FREQUENCY	FILTER	DATA FREQ.	DEFLECTION	DATA
4	#14 22.0 Kc	STD.	50 cps	EQUAL	AGC RADAR #1
4	#15 30 Kc	"	"	"	AGC RADAR #2
4	#16 40 Kc	"	"	"	AGC RADAR #3
2	#10 5.4 Kc	"	"	"	RANGE TLM 1 AGC 213.5 MC
3	#9 3.9 Kc	"	"	"	± 5 G 180° ACCEL.
3	#10 5.4 Kc	"	"	"	± 5 G 90° CWLF ACCEL.
3	#11 7.35 Kc	"	80 cps.	"	Z-AXIS ACCEL.
7					IRIG FORMAT "C"

APPENDIX X

PAPER RECORD # 4

A71143

TRANSMITTER TDI 5W LOCATION HOSE COIL R.F. FREQ. 219.5 MC

COPIES 1 at paper rate 10 MM/SEC SANBORN

RECORD INTERVAL: FROM: T-2 MIN TO: SPLASH

DATA SOURCE: LAUNCH T/M TAPE

TIME REQUIRED: T+2 DAYS

TRACK	SUBCARRIER FREQUENCY	FILTER	DATA FREQ.	DEFLECTION	DATA
3	#9 3.9 Kc	STD	60 cps	EQUAL	PLASMA PR. 3" D.C. 10N
3	#13 70Kc CH. 3425	GAUSSIAN	10 cps	"	PHOTOMETER DIRECT
3	#13 70Kc CH. 23	"	"	"	PHOTOMETER PEAK
3	#13 70Kc CH. 10425	"	"	"	PLASMA PR. 1/4" D.C. 10N
3	#18 70Kc CH. 11	"	"	"	PLASMA PR. TRAP PROGRAM
3	#18 70Kc CH. 4419	"	"	"	90° CWLF MAGNETOMETER
3	#18 70Kc CH. 26	"	100 cps	"	SUBCOMMUTATOR
7					IRIG FORMAT "C"

APPENDIX X

PAPER RECORD # 5

AA143

TRANSMITTER TDI 5W LOCATION NOSE CONE R.F. FREQ. 219.5 MC

COPIES 1 at paper rate 10 MM/SEC SANBORN

RECORD INTERVAL: FROM: T-10 SEC TO: SPLASH

DATA SOURCE: LAUNCH T/M TAPE

TIME REQUIRED: T+2 DAYS

TRACK	SUBCARRIER FREQUENCY	FILTER	DATA FREQ.	DEFLECTION	DATA
3	#18 70Kc CH. 4+15	GAUSSIAN	10 cps.	EQUAL	90° CWLF MAGNETOMETER
3	#18 70Kc CH. 3+18	"	"	"	0° MAGNETOMETER
3	#18 70Kc CH. 3+24	"	"	"	PHOTOMETER DIRECT
3	#18 70Kc CH. 23	"	"	"	PHOTOMETER PEAK
3	#18 70Kc CH. 12+27	"	"	"	C.R.A.
3	#18 70Kc CH. 5+20	"	"	"	Z-AXIS ACCEL.
3	#18 70Kc CH. 26	"	100 cps	"	SUBCOMMUTATOR
7					IRIG FORMAT "C"

APPENDIX X

PAPER RECORD # 6

AAII 43

TRANSMITTER TDI 5W LOCATION NOSE CONE R.F. FREQ. 219.5 MC

COPIES 1 at paper rate 10 MM/SEC SAIBORN

RECORD INTERVAL: FROM: T-2 MIN. TO: SPLASH

DATA SOURCE: LAUNCH T/M TAPE

TIME REQUIRED: T+2 DAYS

TRACK	SUBCARRIER FREQUENCY	FILTER	DATA FREQ.	DEFLECTION	DATA
3	#3 3.3 Kc	STD	60 cps	EQUAL	$\pm 5G$ 180° ACCEL.
3	#18 70Kc CH. 6	GAUSSIAN	10 cps	"	M.M. #1
3	#18 70Kc CH. 7	"	"	"	M.M. #2
3	#18 70Kc CH. 8	"	"	"	M.M. #3
3	#18 70Kc CH. 3+18	"	"	"	0° MAGNETOMETER
3	#18 70Kc CH. 5+20	"	"	"	Z-AXIS ACCEL.
3	#18 70Kc CH. 26	"	100 cps	"	SUBCOMMUTATOR.
7					IRIG FORMAT "C"

APPENDIX X

PAPER RECORD # 7

AAII 43

TRANSMITTER TDI 5W LOCATION NOSE CONE R.F. FREQ. 219.5 MC

COPIES 1 at paper rate 10 MM/SEC SANBORN

RECORD INTERVAL: FROM: T-10 SEC TO: SPLASH

DATA SOURCE: LAUNCH T/M TAPE

TIME REQUIRED: T + 2 DAYS

TRACK	SUBCARRIER FREQUENCY	FILTER	DATA FREQ.	DEFLECTION	DATA
3	#18 70Kc CH. 3+18	GAUSSIAN	10 cps	EQUAL	0° MAGNETOMETER
3	#18 70Kc CH. 4+19	"	"	"	90° MAGNETOMETER
3	#18 70Kc CH. 5+20	"	"	"	Z-AXIS ACCEL.
3	#18 70Kc CH. 9+24	"	"	"	PHOTOMETER DIRECT
3	#18 70Kc CH. 23	"	"	"	PHOTOMETER PEAK
3	#18 70Kc CH. 12+27	"	"	"	C.R.A.
3	#18 70Kc CH. 17	"	"	"	+26 V MON.
7					IRIS FORMAT "C"

APPENDIX X

PAPER RECORD # 8

AAII 43

TRANSMITTER TDI 5W LOCATION NOSE CONE R.F. FREQ. 212.5 MC

COPIES 1 at paper rate 10 MM/SEC SANBORN

RECORD INTERVAL: FROM: T-10 SEC. TO: SPLASH

DATA SOURCE: LAUNCH T/M TAPE

TIME REQUIRED: T+2 DAYS

TRACK	SUBCARRIER FREQUENCY	FILTER	DATA FREQ.	DEFLECTION	DATA
3	#18 70Kc CH. 13	GAUSSIAN	10 cps	EQUAL	RADAR RECON -6.5V
3	#18 70Kc CH. 14	"	"	"	" MOD.
3	#18 70Kc CH. 15	"	"	"	" Rx
3	#18 70Kc CH. 16	"	"	"	" R.F.
3	#18 70Kc CH. 21	"	"	"	SQUIB BATTERY
3	#18 70Kc CH. 22	"	"	"	SQUIB MONITOR
3	#18 70Kc CH. 28	"	100 cps	"	SUBCOMMUTATOR
7					IRIG FORMAT "C"